

60V N-Channel Power MOSFET

● General Description

It combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$.

● Features

- AEC-Q101 Qualified
- Low $R_{DS(ON)}$ to minimize conductive loss
- High GOX reliability
- Low Thermal resistance

● Application

- BLDC Motor driver
- DC-DC
- Battery protection


● Ordering Information:

Part NO.	KNSZM500N06-V
Marking	500N06
Packing Information	REEL TAPE
Basic ordering unit (pcs)	3000

● Absolute Maximum Ratings ($T_C=25^\circ\text{C}$)

Parameter	Symbol	Conditions	Value	Unit
Drain-Source Voltage	V_{DS}	$25^\circ\text{C} \leq T_J \leq 150^\circ\text{C}$	60	V
Gate-Source Voltage	V_{GS}		± 20	V
Continuous Drain Current	I_D	$T_C=25^\circ\text{C}$	3.4	A
	I_D	$T_C=75^\circ\text{C}$	2.7	A
	I_D	$T_C=100^\circ\text{C}$	2.2	A
Pulsed Drain Current	I_{DM}	Pulsed; $t_p \leq 10 \mu\text{s}$; $T_{mb} = 25^\circ\text{C}$;	13.6	A
Total Power Dissipation	P_D	$T_C=25^\circ\text{C}$	2	W
Total Power Dissipation	P_D	$T_A=25^\circ\text{C}$	0.7	W
Operating Junction Temperature	T_J		-55 to +150	$^\circ\text{C}$
Storage Temperature	T_{STG}		-55 to +150	$^\circ\text{C}$
Single Pulse Avalanche Energy	E_{AS}	$L=0.1\text{mH}$, $V_{GS}=10\text{V}$, $R_g=25\Omega$,	5	mJ
		$L=0.5\text{mH}$, $V_{GS}=10\text{V}$, $R_g=25\Omega$,	10.5	mJ
ESD Level (HBM)	CLASS 1B			


● Product Summary



$$V_{DS} = 60\text{V}$$

$$R_{DS(ON)} = 50\text{m}\Omega$$

$$I_D = 4\text{A}$$



SOT23-3

● **Thermal resistance**

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction - case	R_{thJC}		-	80	°C/W
Thermal resistance, junction-ambient ^①	R_{thJA}		-	180	°C/W
Soldering temperature	T_{sold}		-	260	°C

● **Electronic Characteristics**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	60			V
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	1.3	1.7	2.5	V
Drain-Source Leakage Current	I_{DSS}	$V_{GS}=0V, V_{DS}=60V$			1.0	μA
Gate- Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$			100	nA
Static Drain-source On Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=5A$		50	65	m Ω
		$V_{GS}=4.5V, I_D=3A$		70	90	m Ω
Forward Transconductance	g_{FS}	$V_{GS}=5V, I_{SD}=10A$		5		S
Diode Forward Voltage	V_{FSD}	$V_{GS}=0V, I_{SD}=5A$			1.3	V

● **Dynamic characteristics**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input capacitance	C_{iss}	$f=1MHz, V_{DS}=25V$	-	700	-	pF
Output capacitance	C_{oss}		-	33	-	
Reverse transfer capacitance	C_{rss}		-	19	-	
Gate Resistance	R_g	$f=1MHz$	-	1		Ω
Total gate charge	Q_g	$V_{DD}=15V, I_D=20A, V_{GS}=10V$	-	11	-	nC
	$Q_g(4.5V)$		-	5.5	-	
Gate - Source charge	Q_{gs}		-	2.5	-	
Gate - Drain charge	Q_{gd}		-	1.5	-	
Turn-ON Delay time	$t_{D(on)}$	$V_{GS}=10V, V_{DS}=15V, R_G=3.3\Omega, I_D=20A$	-	2	-	ns
Turn-ON Rise time	t_r		-	3	-	ns
Turn-Off Delay time	$t_{D(off)}$		-	10	-	ns
Turn-Off Fall time	t_f		-	7	-	ns
Reverse Recovery Time	t_{RR}	$V_{DD}=20V, dI_S/dt=100A/s,$	-	30	-	ns
Reverse Recovery Charge	Q_{RR}	$I_S=20A$	-	28	-	nC

Fig.1 Gate-Charge Characteristics

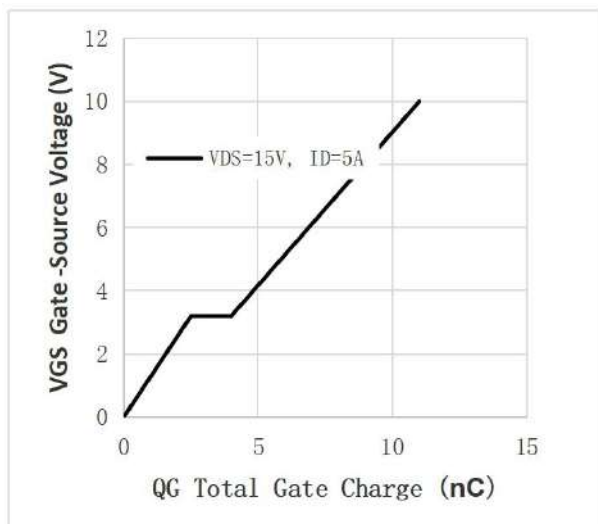


Fig.2 Capacitance Characteristics

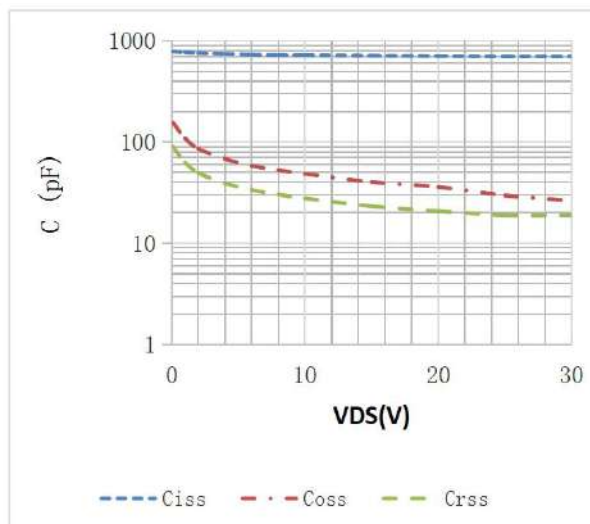


Fig.3 Power Dissipation

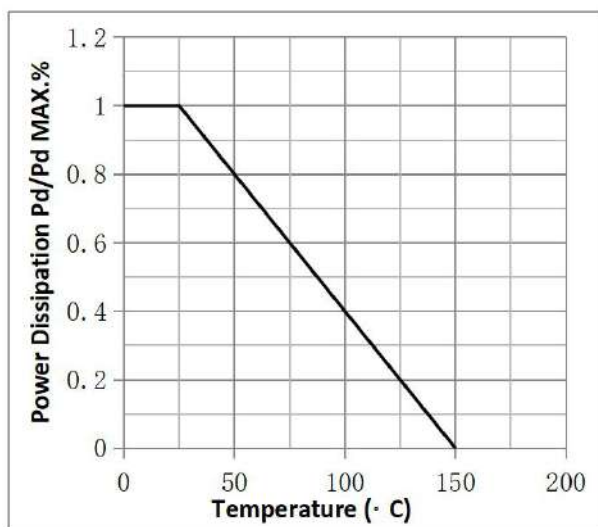


Fig.4 Typical output Characteristics

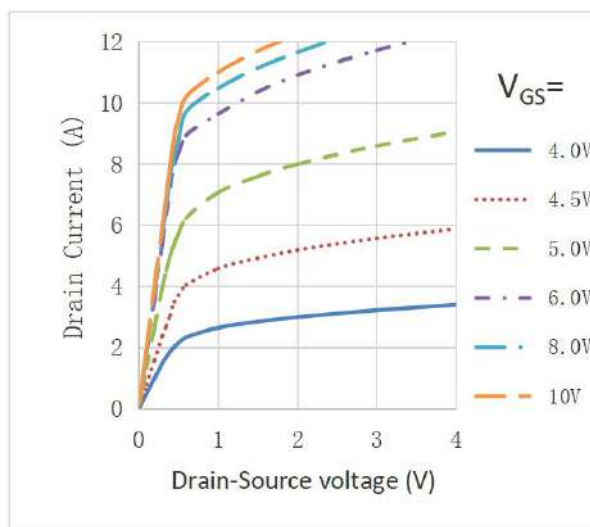


Fig.5 Threshold Voltage V.S Junction Temperature

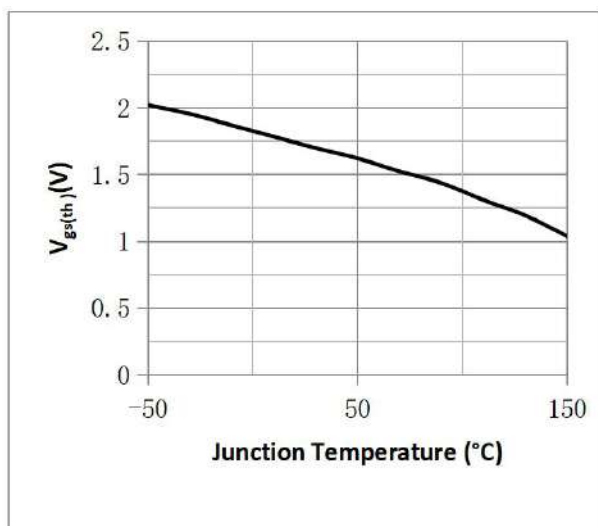


Fig.6 Resistance V.S Drain Current

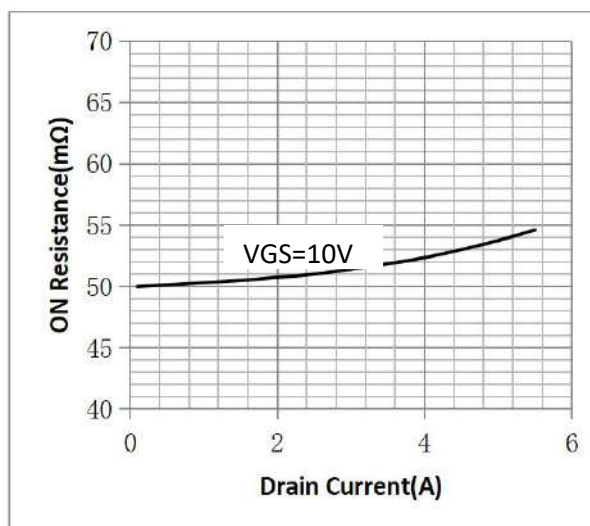


Fig.7 On-Resistance VS Gate Source Voltage

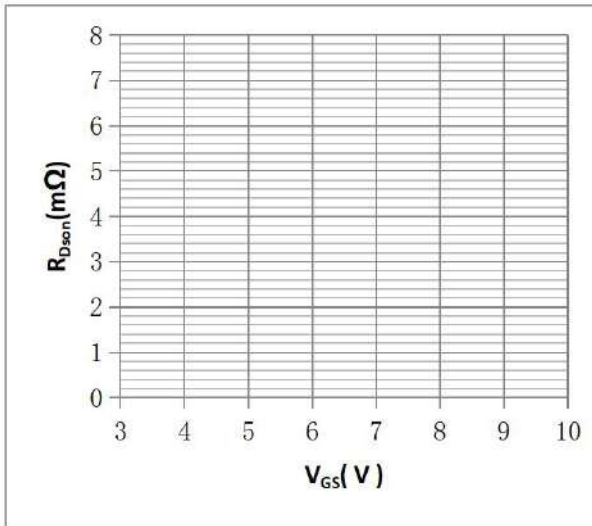


Fig.8 On-Resistance V.S Junction Temperature

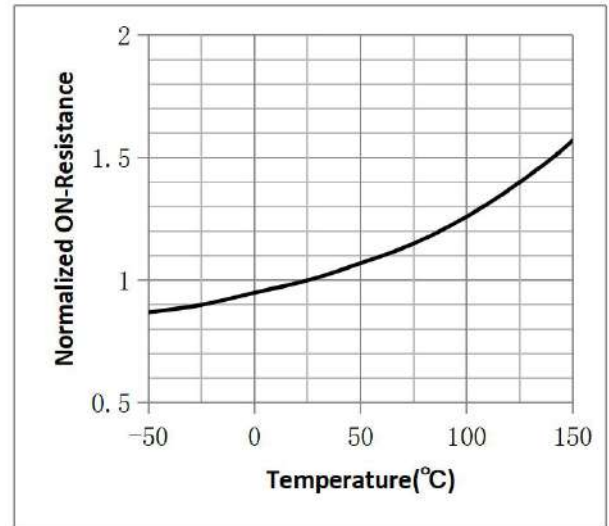


Figure 9. Diode Forward Voltage vs. Current

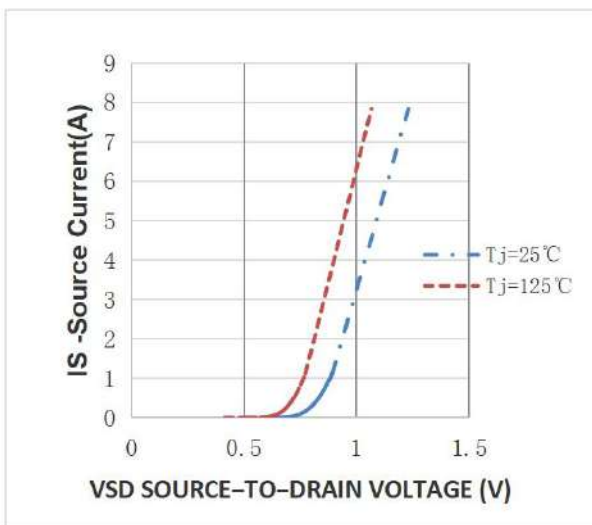


Figure 10. Transfer Characteristics

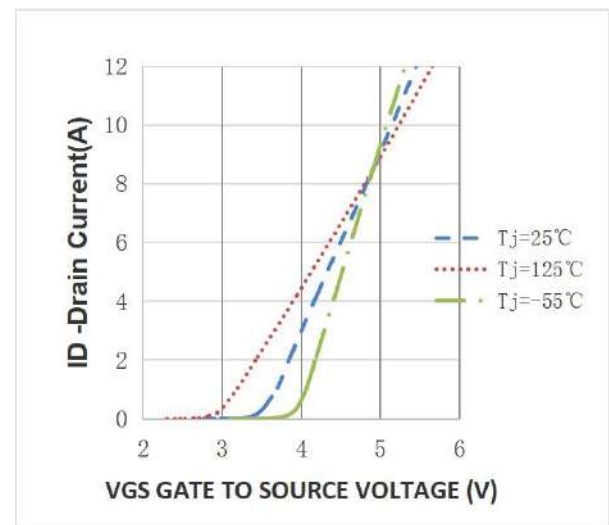


Fig.11 SOA Maximum Safe Operating Area



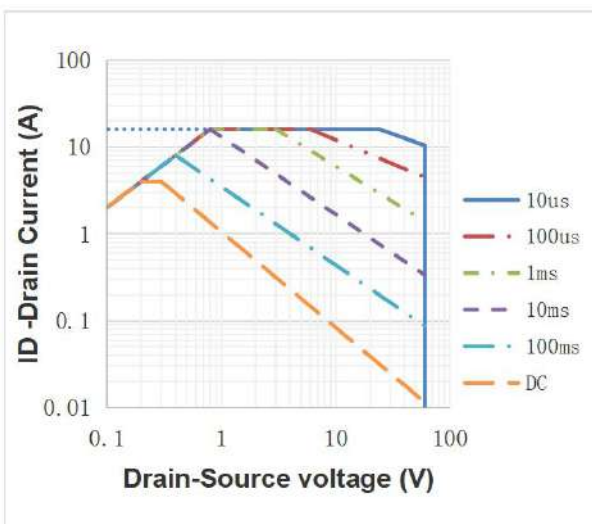


Fig.12 ID vs. Case Temperature^②

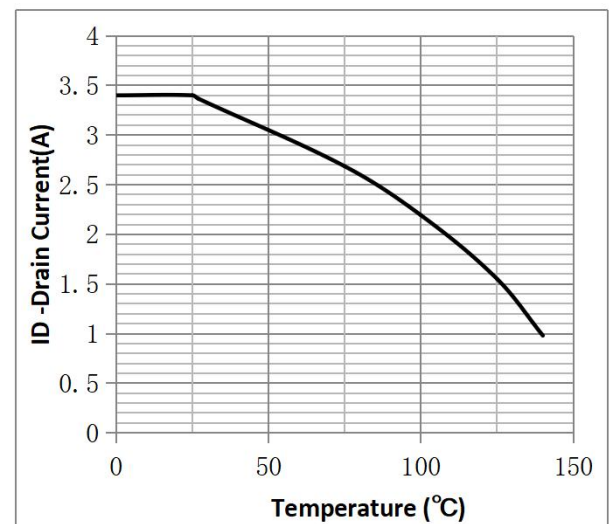

●SOT23-3 Package Outline

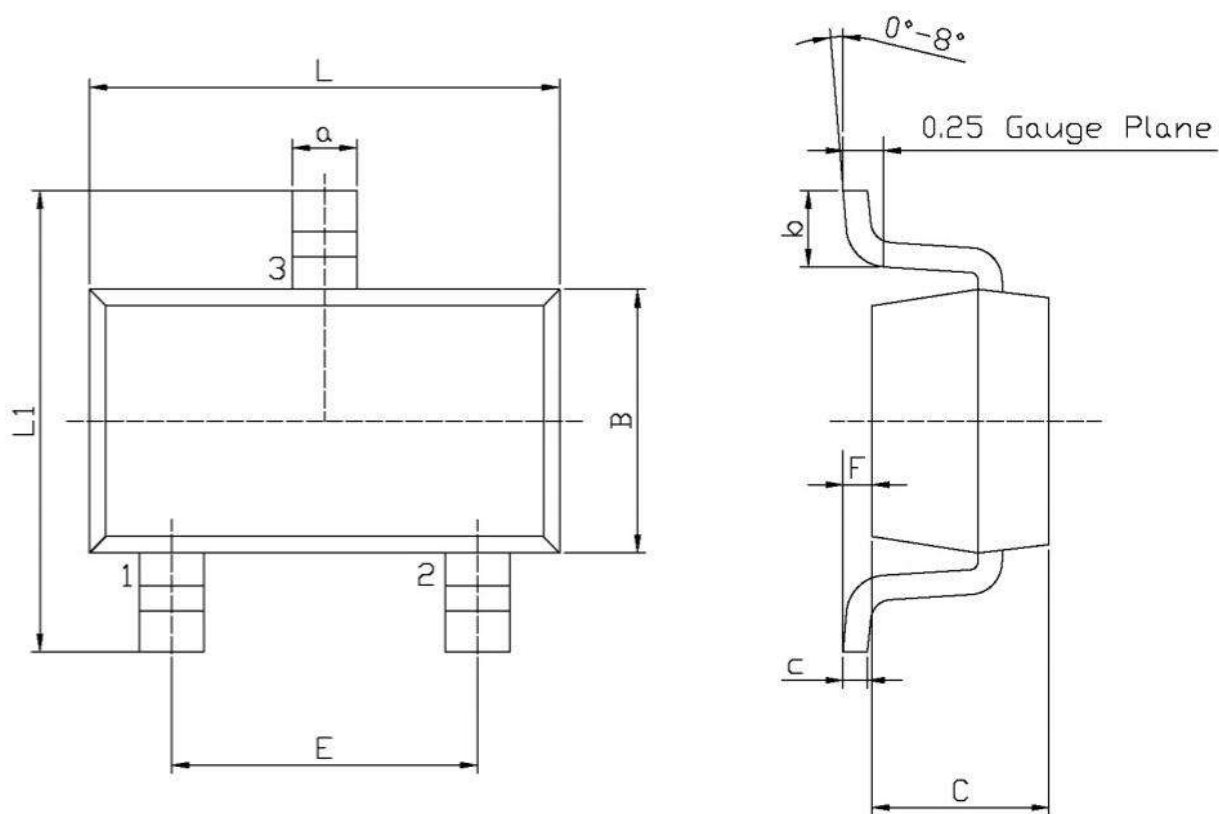

Unit: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.82	3.02	a	0.35	0.50
B	1.50	1.70	c	0.10	0.20
C	0.90	1.30	b	0.35	0.55
L1	2.60	3.00	F	0	0.15
E	1.80	2.00			

Note:

- ① Device mounted on FR-4 substrate PC board, 2oz copper, with thermal bias to bottom layer 1inch square copper plate;
- ② Practically the current will be limited by PCB, thermal design and operating temperature.
VGS=10V.