



N- AND P-Channel Enhancement Mode MOSFET

Features:

- Simple drive requirement
- Low gate charge
- Low on-resistance
- Fast switching speed
- Pb-free lead plating and halogen-free package

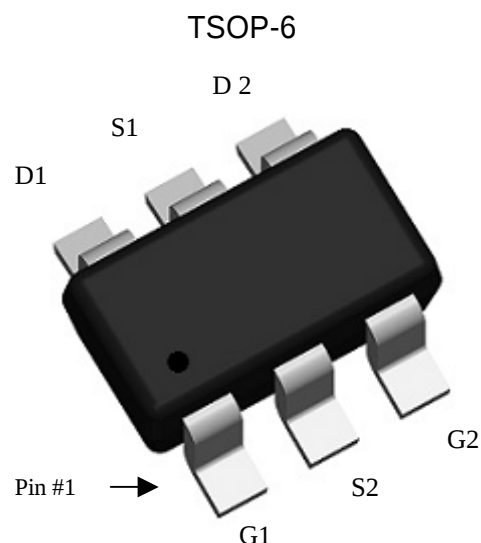

	N-CH	P-CH
BV _{DSS}	20V	-20V
I _D	4.5A (V _{GS} =4.5V)	-3A (V _{GS} =-4.5 V)
R _{DS(on)} (TYP.)	24mΩ (V _{GS} =4.5V)	56mΩ (V _{GS} =-4.5V)
	28mΩ (V _{GS} =2.5V)	71mΩ (V _{GS} =-2.5V)
	69mΩ (V _{GS} =1.5V)	125mΩ (V _{GS} =-1.5V)

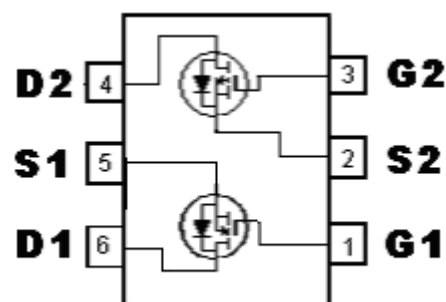

G : Gate S : Source D : Drain

Ordering Information

Device	Package	Shipping
KWC3585G6	TSOP-6 (Pb-free lead plating and halogen-free package)	3000 pcs / tape & reel

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits		Unit
		N-channel	P-channel	
Drain-Source Breakdown Voltage	BV _{DSS}	20	-20	V
Gate-Source Voltage	V _{GS}	±12	±12	
Continuous Drain Current @T _A =25 °C (Note 1)	I _D	4.5	-3	A
Continuous Drain Current @T _A =70 °C (Note 1)		3.6	-2.4	
Pulsed Drain Current (Note 2)	I _{DM}	20	-20	
Total Power Dissipation (Note 1)	P _d	1.14		W
Linear Derating Factor		0.01		W / °C
Operating Junction and Storage Temperature	T _j , T _{stg}	-55~+150		°C

Note : 1.Surface mounted on 1 in² copper pad of FR-4 board, t≤5 sec
2.Pulse width limited by maximum junction temperature

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-case, max	R _{θJC}	80	°C/W
Thermal Resistance, Junction-to-ambient, max	R _{θJA}	110 (Note)	

Note :.Surface mounted on 1 in² copper pad of FR-4 board, t≤5 sec; 180°C/W when mounted on minimum copper pad

N-Channel Electrical Characteristics (Tj=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	20	-	-	V	V _{GS} =0V, I _D =250μA
ΔBV _{DSS} /ΔT _j	-	0.02	-	V/°C	Reference to 25°C, I _D =1mA
V _{GS(th)}	0.5	0.7	1.2	V	V _{DS} =V _{GS} , I _D =250μA
I _{GSS}	-	-	±100	nA	V _{GS} =±12V, V _{DS} =0V
I _{DSS}	-	-	1	μA	V _{DS} =20V, V _{GS} =0V
	-	-	10		V _{DS} =16V, V _{GS} =0V, T _j =70°C
*R _{DS(ON)}	-	24	35	mΩ	I _D =3.5A, V _{GS} =4.5V
	-	28	50		I _D =1.2A, V _{GS} =2.5V
	-	69	105		I _D =0.5A, V _{GS} =1.5V
*G _{FS}	-	7	-	S	V _{DS} =5V, I _D =3A
Dynamic					
C _{iss}	-	406	-	pF	V _{DS} =20V, V _{GS} =0V, f=1MHz
C _{oss}	-	47	-		
C _{rss}	-	37	-		
*t _{d(ON)}	-	4	-	ns	V _{DS} =15V, I _D =1A, V _{GS} =5V, R _G =3.3Ω, R _D =15Ω
*t _r	-	15.2	-		
*t _{d(OFF)}	-	28.2	-		
*t _f	-	5	-		

*Qg	-	7	-	nC	V _{DS} =16V, I _D =3A, V _{GS} =4.5V
*Qgs	-	0.7	-		
*Qgd	-	1.9	-		
Source-Drain Diode					
*V _{SD}	-	0.79	1.2	V	V _{GS} =0V, I _S =1.2A
*trr	-	5.4	-	ns	I _F =3A, V _{GS} =0V, dI _F /dt=100A/μs
*Qrr	-	2	-	nC	

*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%


P-Channel Electrical Characteristics (T_j=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	-20	-	-	V	V _{GS} =0V, I _D =-250μA
ΔBV _{DSS} /ΔT _j	-	-0.01	-	V/°C	Reference to 25°C, I _D =-1mA
V _{GS(th)}	-0.4	-0.8	-1.2	V	V _{DS} =V _{GS} , I _D =-250μA
I _{GSS}	-	-	±100	nA	V _{GS} =±12V, V _{DS} =0V
I _{DSS}	-	-	-1	μA	V _{DS} =-20V, V _{GS} =0V
	-	-	-25		V _{DS} =-16V, V _{GS} =0V, T _j =70°C
*R _{DS(ON)}	-	56	80	mΩ	I _D =-2.5A, V _{GS} =-4.5V
	-	71	130		I _D =-2A, V _{GS} =-2.5V
	-	125	350		I _D =-0.5A, V _{GS} =-1.5V
*G _{FS}	-	6	-	S	V _{DS} =-5V, I _D =-2A
Dynamic					
C _{iss}	-	597	-	pF	V _{DS} =-20V, V _{GS} =0V, f=1MHz
C _{oss}	-	54	-		
C _{rss}	-	40	-		
*t _{d(ON)}	-	4	-	ns	V _{DS} =-10V, I _D =-1A, V _{GS} =-10V, R _G =3.3Ω , R _D =10Ω
*t _r	-	16	-		
*t _{d(OFF)}	-	50	-		
*t _f	-	5.2	-		
*Q _g	-	8.2	-	nC	V _{DS} =-16V, I _D =-2A, V _{GS} =-4.5V
*Q _{gs}	-	1	-		
*Q _{gd}	-	2	-		
Source-Drain Diode					
*V _{SD}	-	-0.82	-1.2	V	V _{GS} =0V, I _S =-1.2A
*t _{rr}	-	6.2	-	ns	I _F =-2A, V _{GS} =0V, dI _F /dt=100A/μs
*Q _{rr}	-	2.3	-	nC	


*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

N-channel Typical Characteristics


Typical Output Characteristics

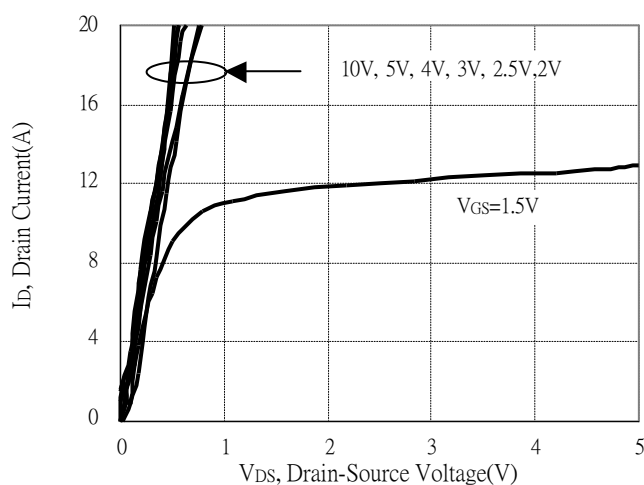


Breakdown Voltage vs Ambient Temperature

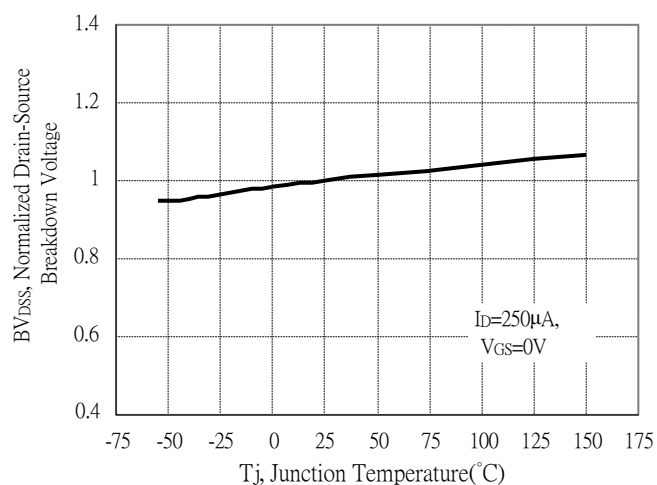


Static Drain-Source On-State resistance vs Drain Current

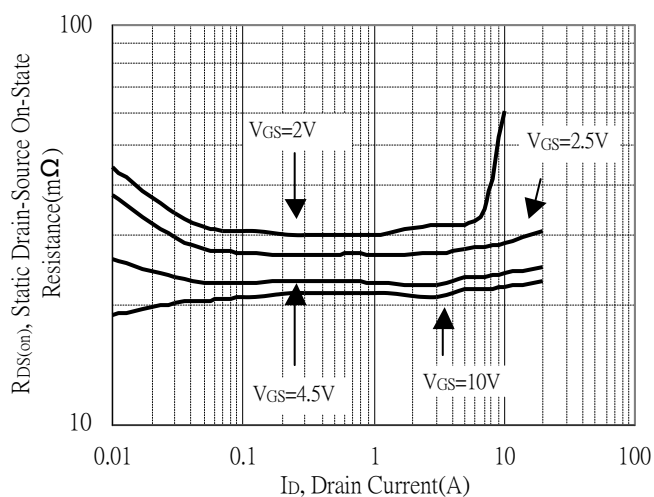


Reverse Drain Current vs Source-Drain Voltage

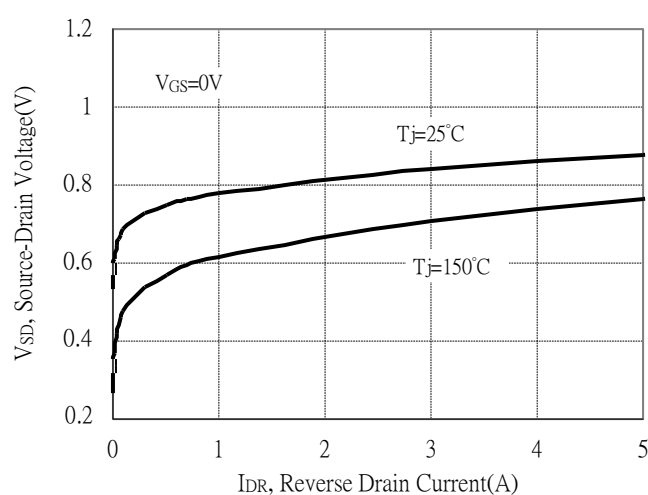

Static Drain-Source On-State Resistance vs Gate-Source Voltage

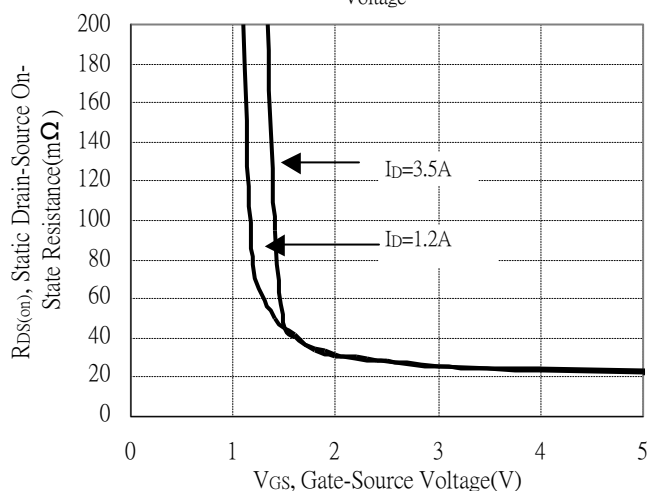


Drain-Source On-State Resistance vs Junction Temperature

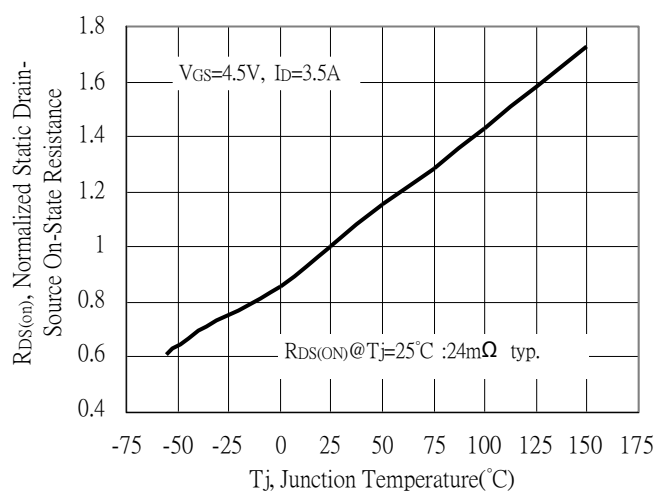


N-channel Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

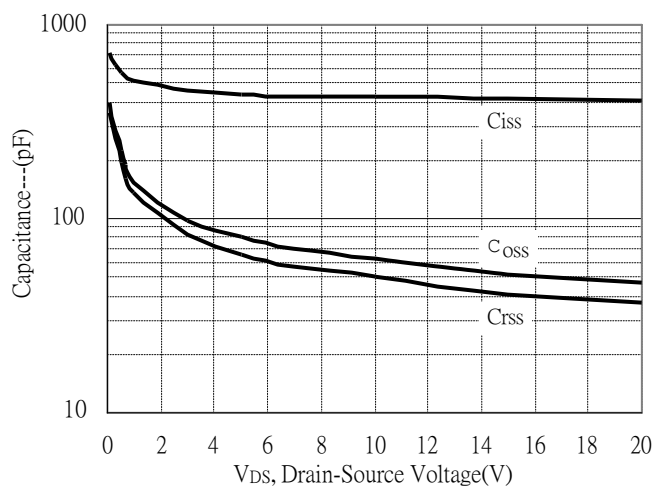


Threshold Voltage vs Junction Temperature

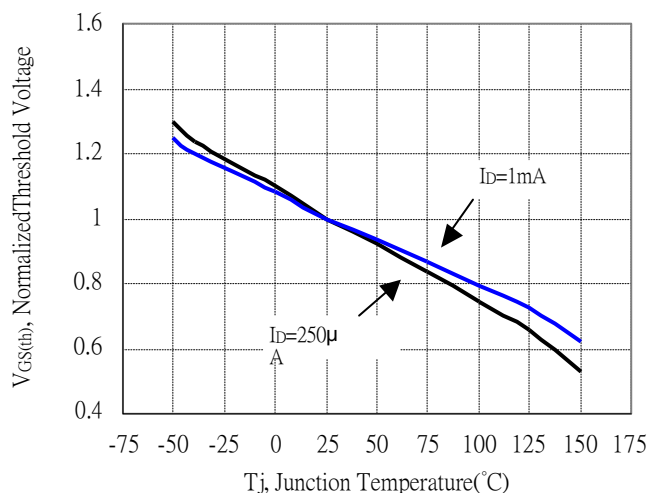


Single Pulse Power Rating, Junction to Ambient

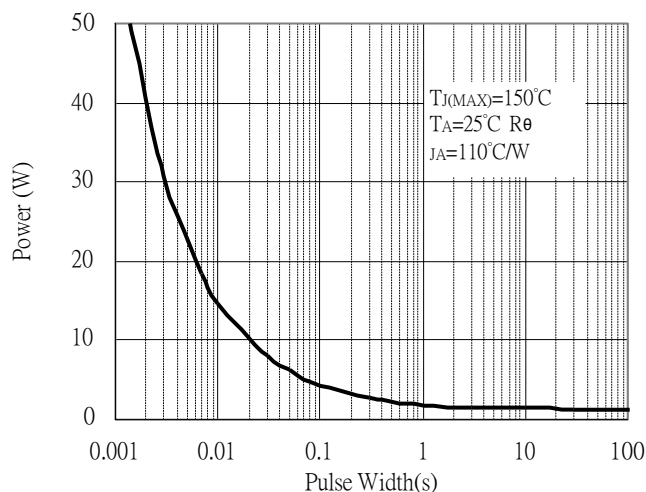


Gate Charge Characteristics

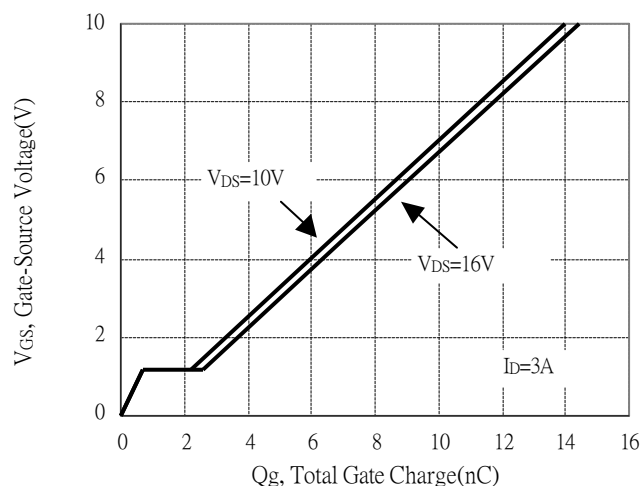

Maximum Safe Operating Area

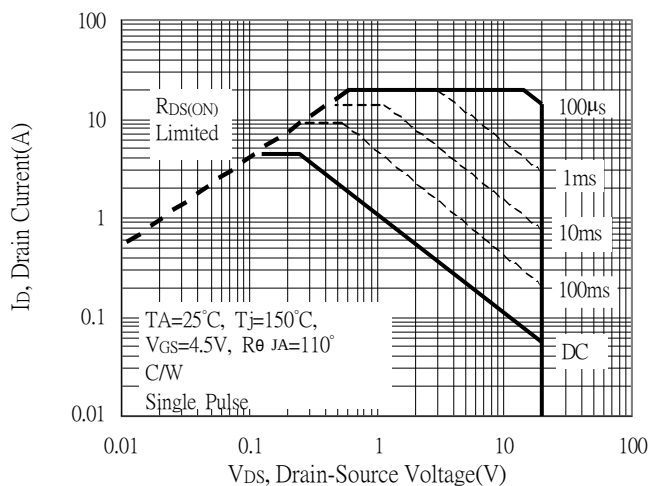


Maximum Drain Current vs Junction Temperature

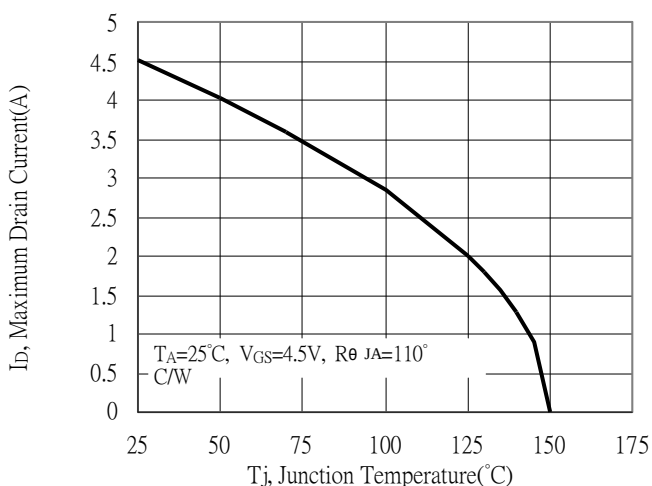


N-channel Typical Characteristics(Cont.)


Typical Transfer Characteristics

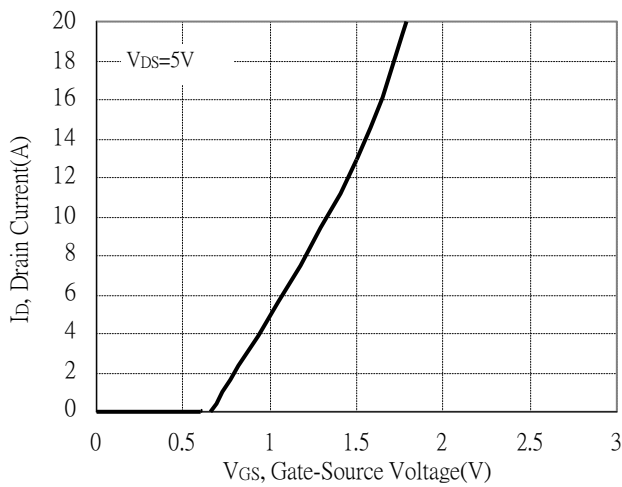


Power Derating Curve

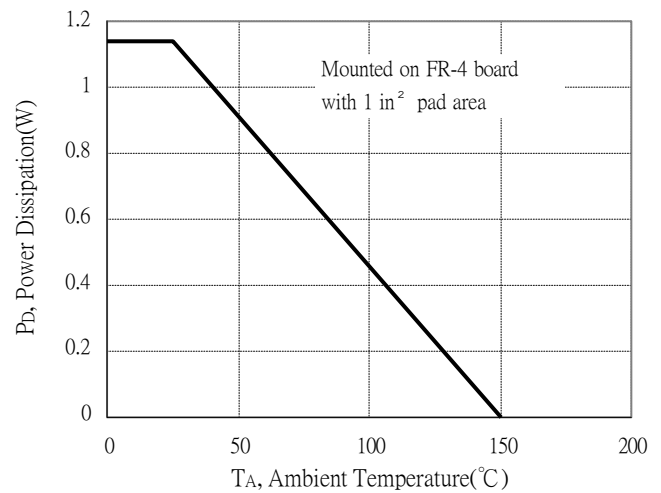

Transient Thermal Response Curves

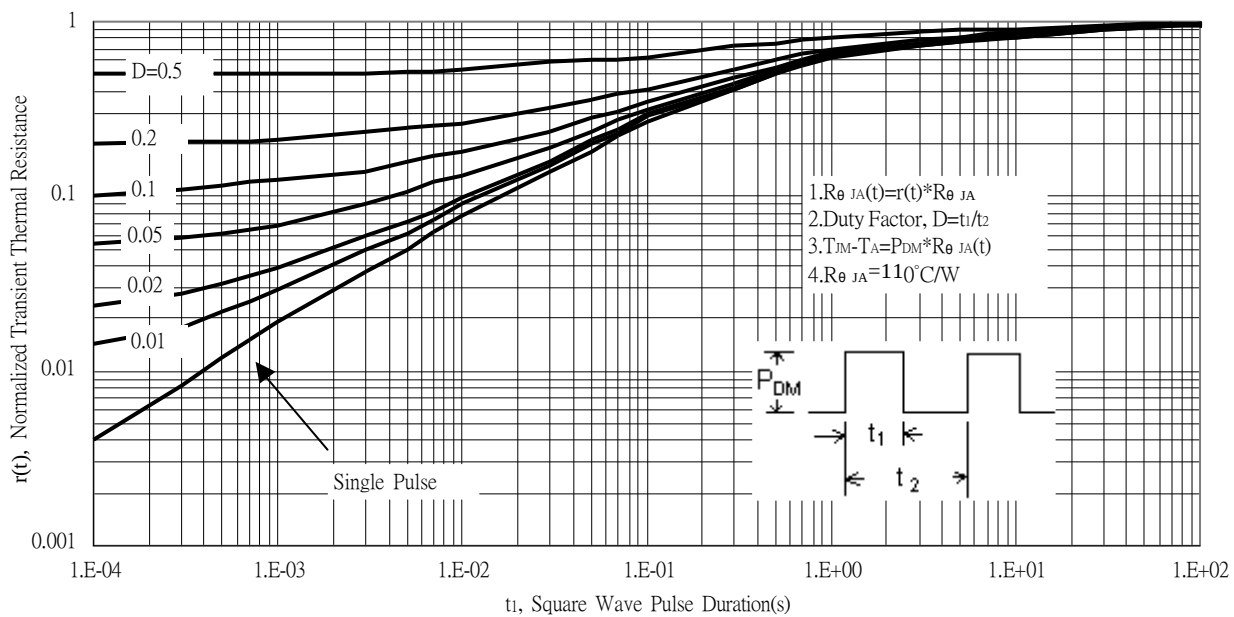


Forward Transfer Admittance vs Drain Current

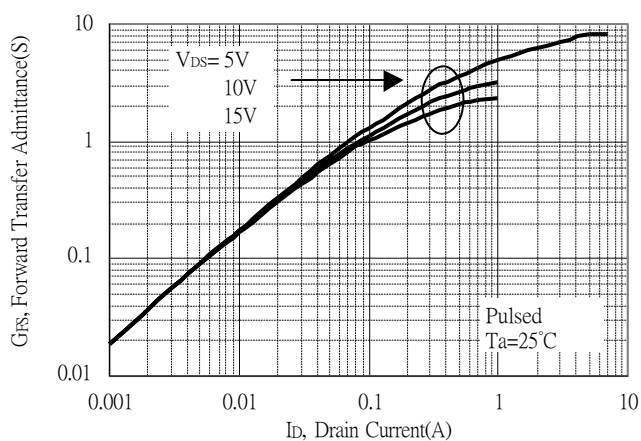


P-channel Typical Characteristics


Typical Output Characteristics

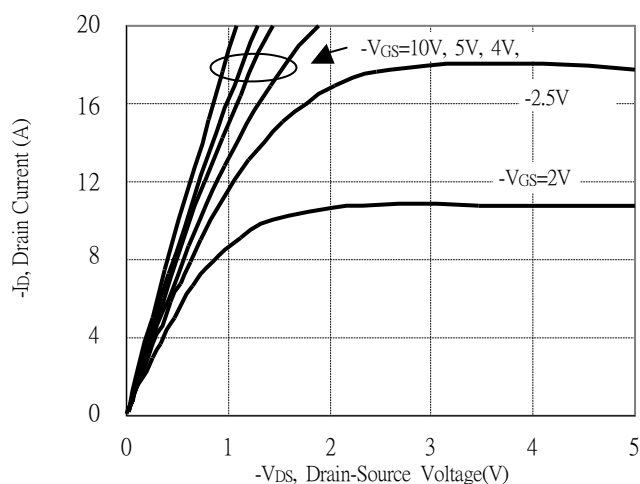


Breakdown Voltage vs Ambient Temperature

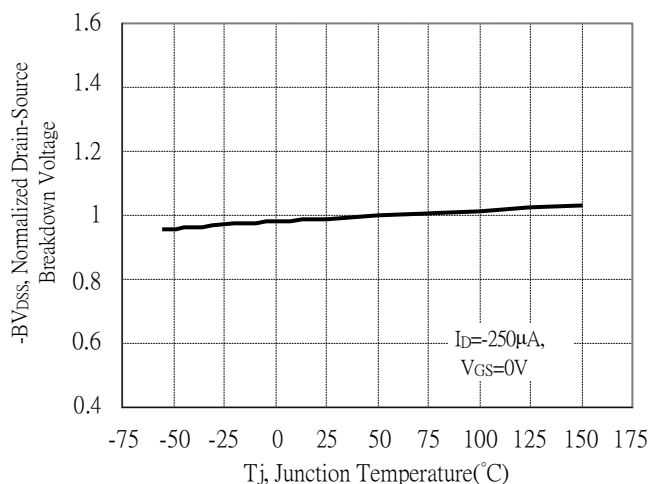


Static Drain-Source On-State resistance vs Drain Current

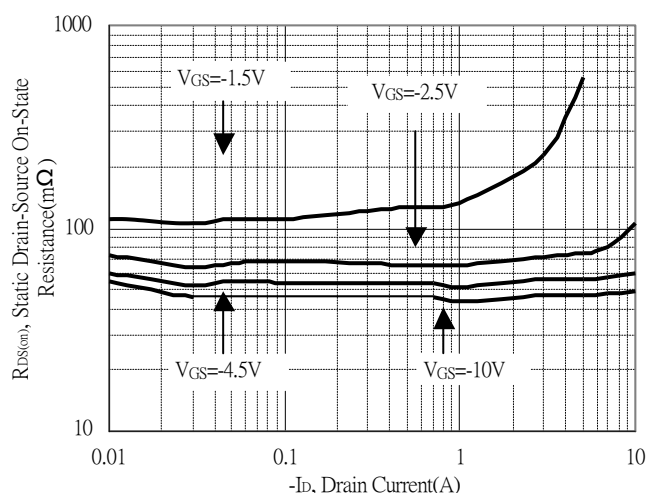


Reverse Drain Current vs Source-Drain Voltage

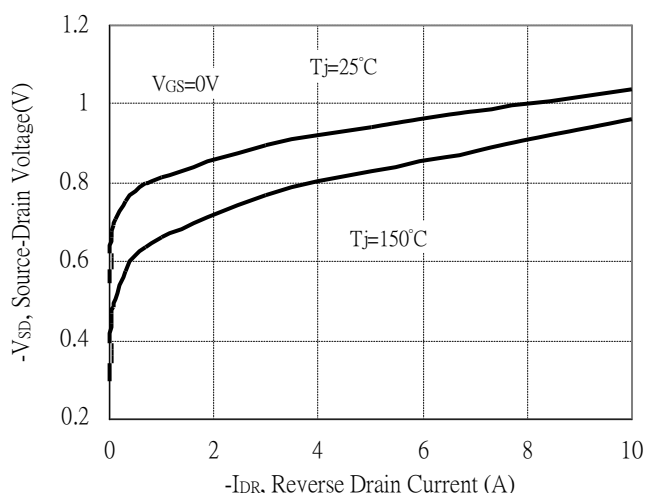

Static Drain-Source On-State Resistance vs Gate-Source Voltage

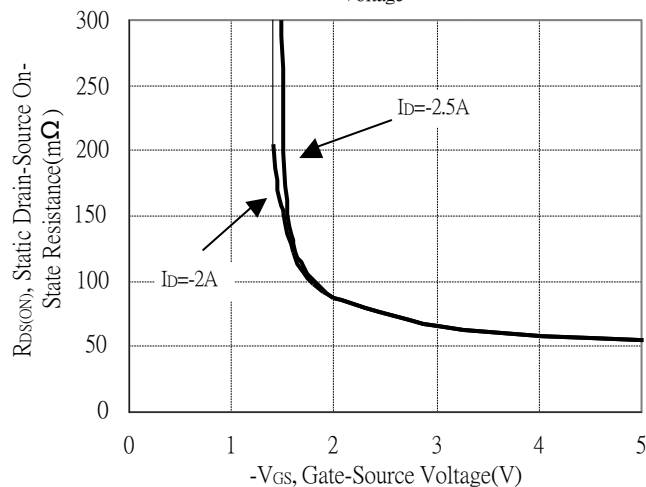


Drain-Source On-State Resistance vs Junction Temperature

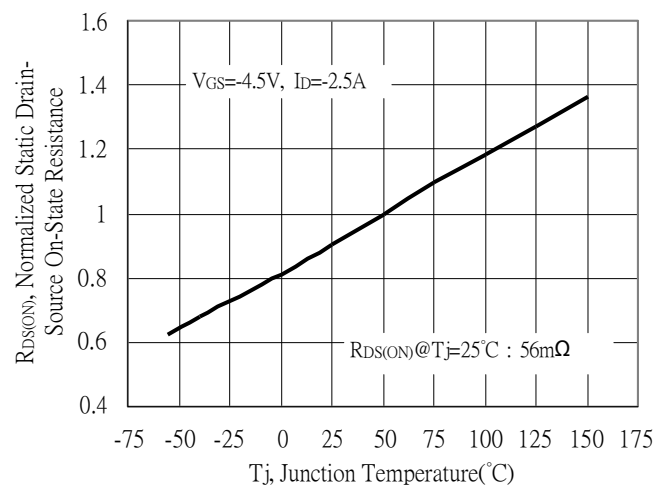


P-channel Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

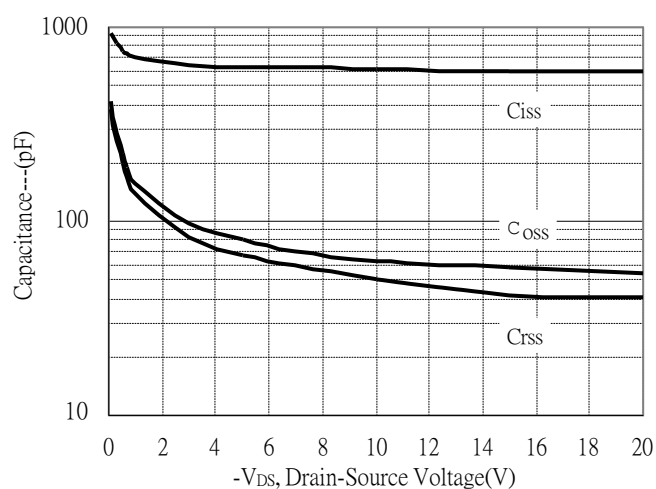


Threshold Voltage vs Junction Temperature

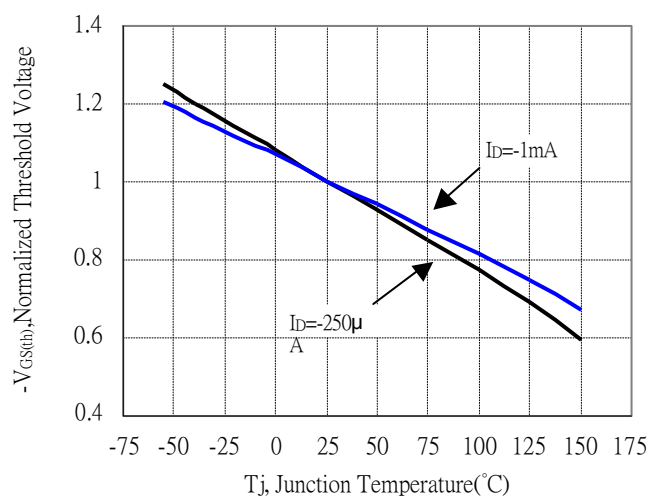


Single Pulse Power Rating, Junction to Ambient

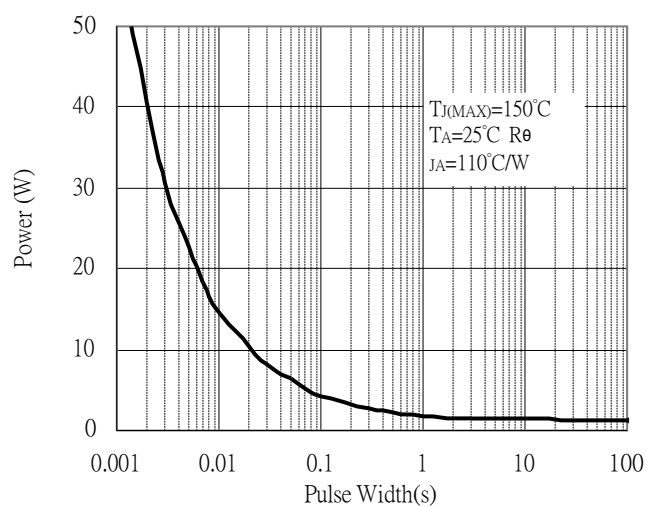


Gate Charge Characteristics

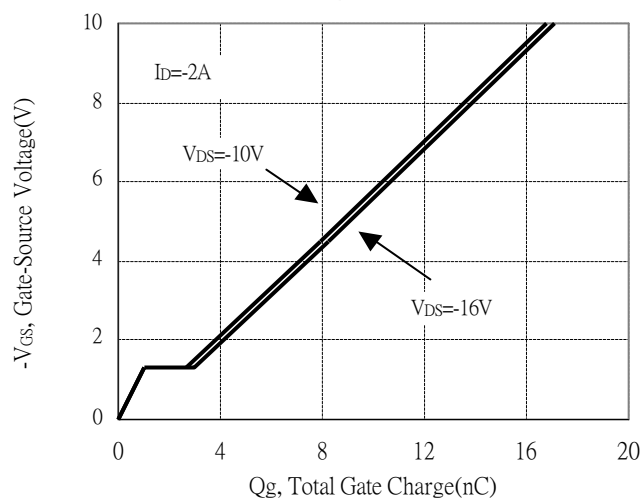

Maximum Safe Operating Area

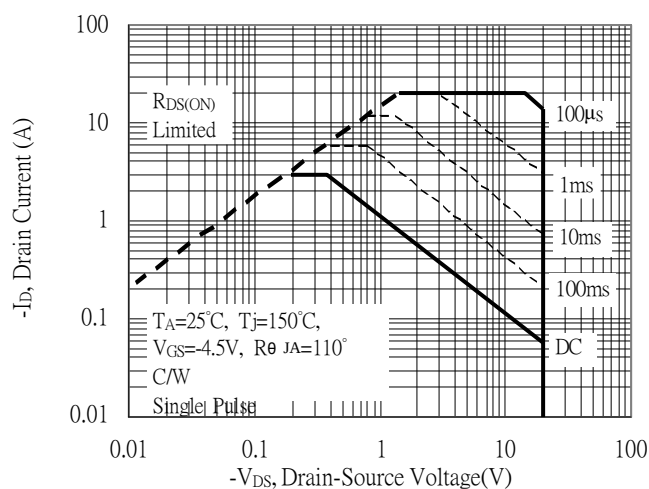


Maximum Drain Current vs Junction Temperature

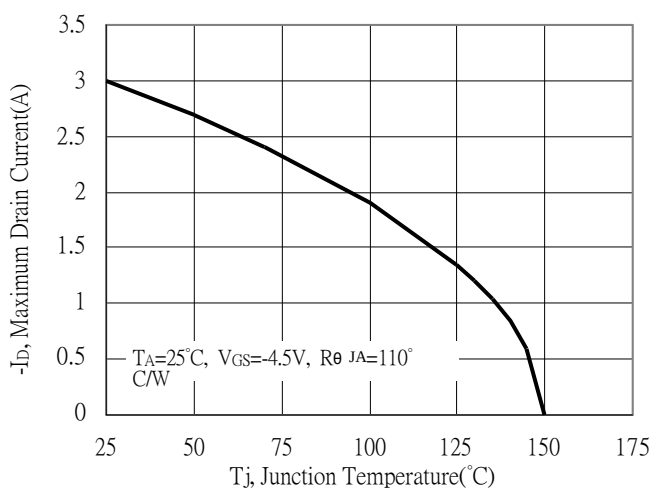


P-channel Typical Characteristics(Cont.)


Typical Transfer Characteristics

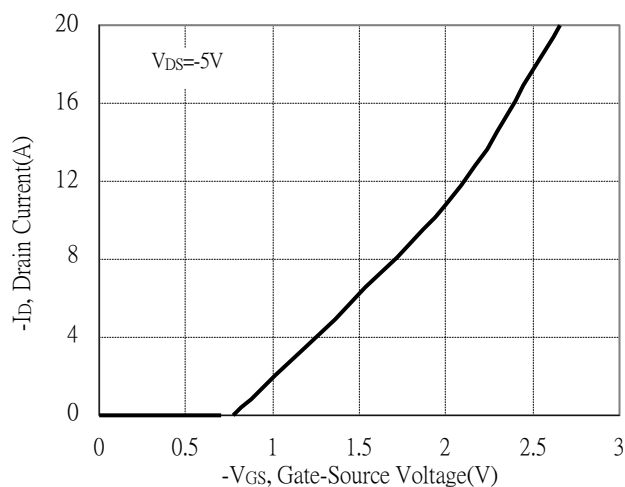


Power Derating Curve

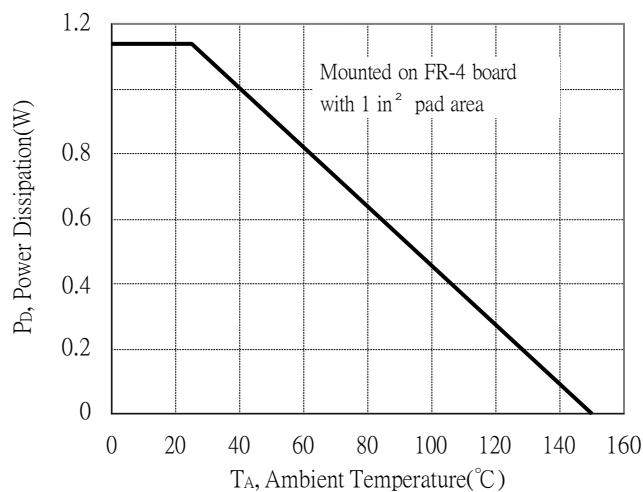



Transient Thermal Response Curves

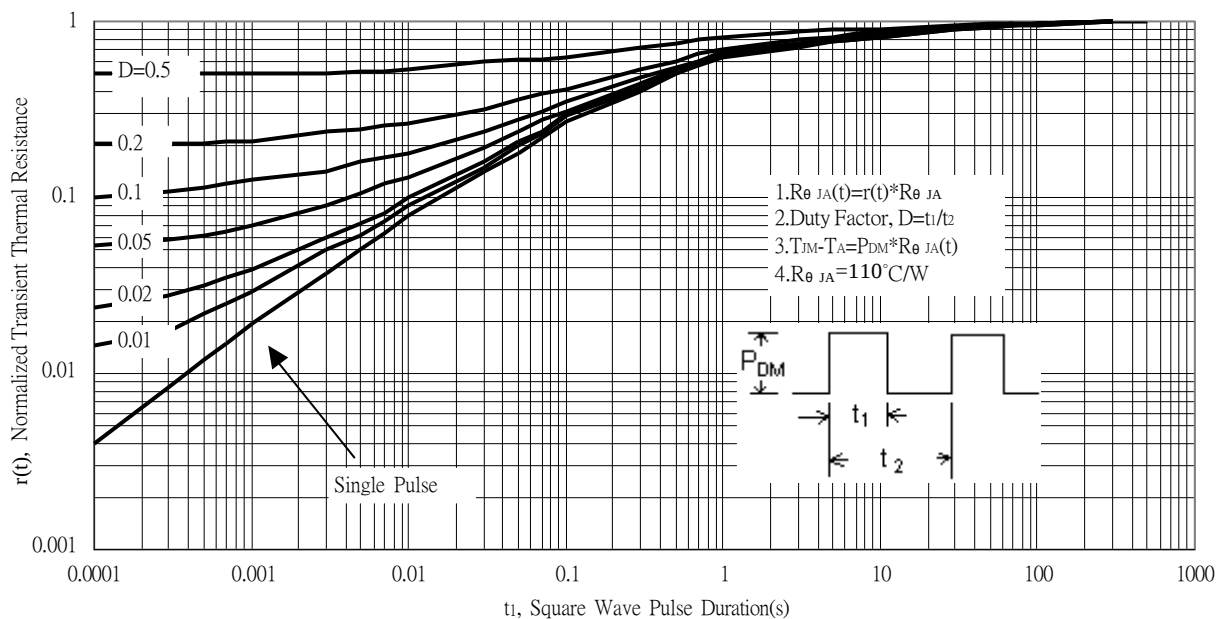


Forward Transfer Admittance vs Drain Current

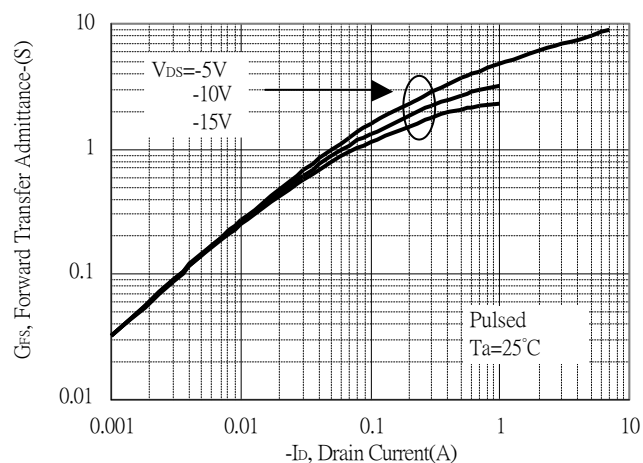

TSOP-6 Dimension

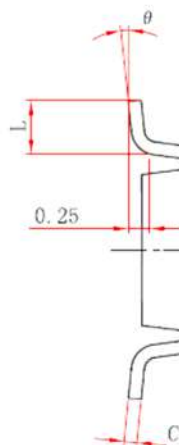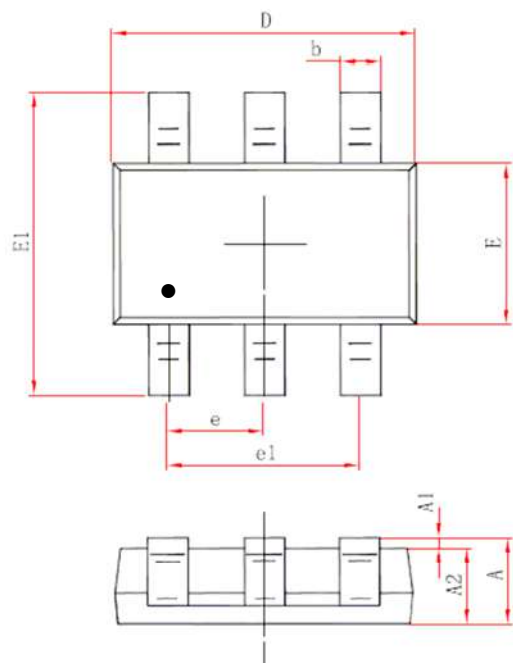

Marking:

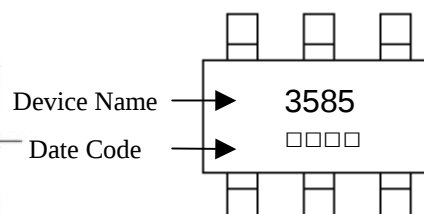

6-Lead TSOP-6 Plastic
 Surface Mounted Package
 Code: G6

Style:

- Pin 1. Gate1 (G1)
- Pin 2. Source2 (S2)
- Pin 3. Gate2 (G2)
- Pin 4. Drain2 (D2)
- Pin 5. Source1 (S1)
- Pin 6. Drain1 (D1)

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035	E	1.600	1.700	0.063	0.067
A1	0.000	0.100	0.000	0.004	E1	2.650	2.950	0.104	0.116
A2	0.700	0.800	0.028	0.031	e	0.950 (BSC)		0.037 (BSC)	
b	0.350	0.500	0.014	0.020	e1	1.900 (BSC)		0.075 (BSC)	
c	0.080	0.200	0.003	0.008	L	0.300	0.600	0.012	0.024
D	2.820	3.020	0.111	0.119	θ	0°	8°	0°	8°