


TO-220A Plastic-Encapsulate Diodes

SCHOTTKY BARRIER RECTIFIER

FEATURES

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

TO-220A

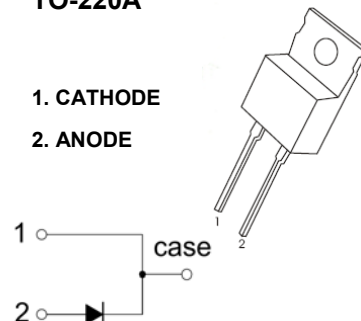

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value				Unit
		MBR1060	MBR1080	MBR1090	MBR10100	
V_{RRM}	Peak repetitive reverse voltage	60	80	90	100	V
V_{RWM}	Working peak reverse voltage					
V_R	DC blocking voltage					
$V_{R(RMS)}$	RMS reverse voltage	42	56	63	70	V
I_O	Average rectified output current	10				A
I_{FSM}	Non-Repetitive peak forward surge current 8.3ms half sine wave	150				A
P_D	Power dissipation	2				W
$R_{\theta JA}$	Thermal resistance from junction to ambient	50				$^\circ\text{C/W}$
T_j	Junction temperature	125				$^\circ\text{C}$
T_{stg}	Storage temperature	-55~+150				$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Device	Test conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	MBR1060	$I_R=1\text{mA}$	60			V
		MBR1080		80			
		MBR1090		90			
		MBR10100		100			
Reverse current	I_R	MBR1060	$V_R=60\text{V}$			0.1	mA
		MBR1080	$V_R=80\text{V}$				
		MBR1090	$V_R=90\text{V}$				
		MBR10100	$V_R=100\text{V}$				
Forward voltage	V_F	MBR1060	$I_F=10\text{A}$			0.8	V
		MBR1080-100				0.84	V

Typical Characteristics

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

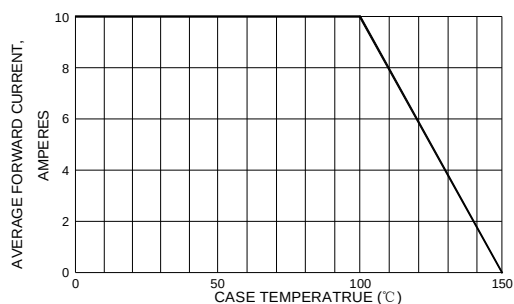


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTIC

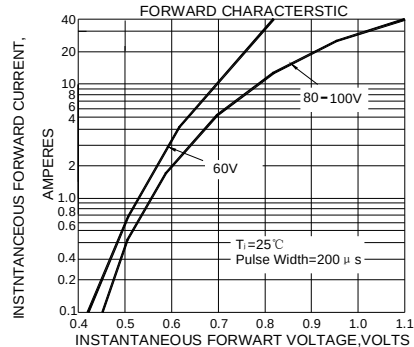


FIG.2-TYPICAL REVERSE
CHARACTERISTICS

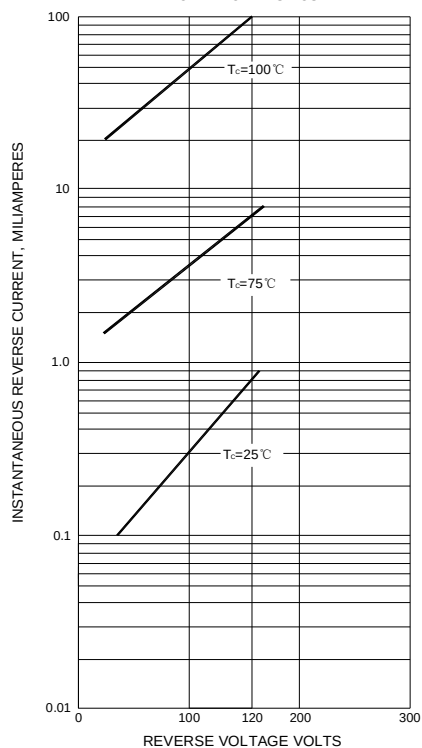


FIG.4-MAXIMUM NON-REPETITIVE
SURGE CURRENT



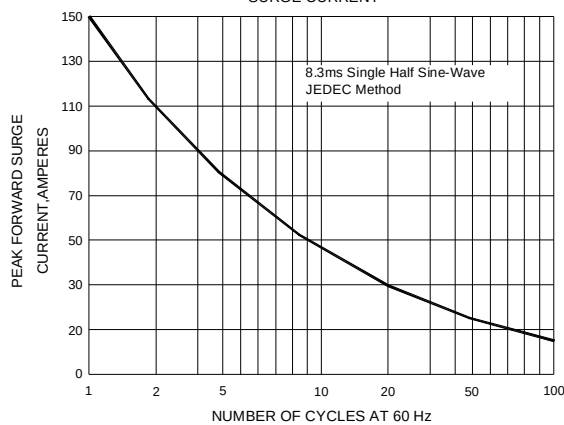


FIG.5-TYPICAL JUNCTION
CAPACITANCE

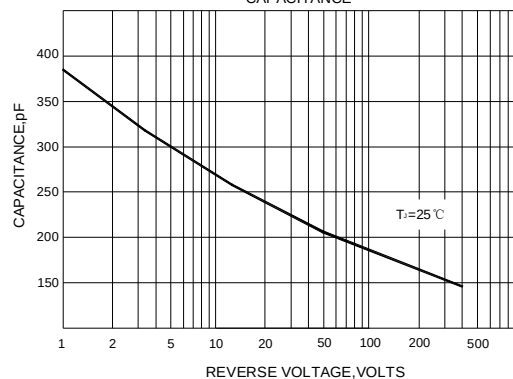

TO-220A Package Outline Dimensions

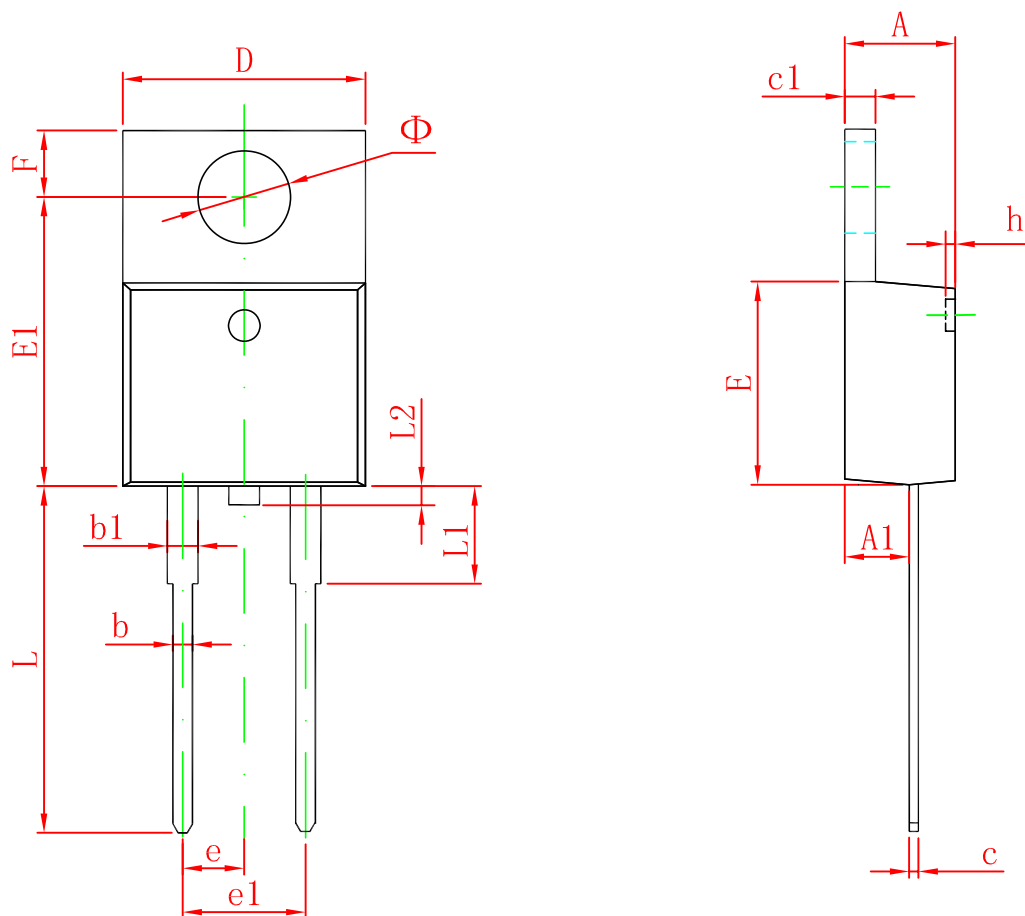

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
L2		1.000		0.039
Φ	3.735	3.935	0.147	0.155