

60V N-Channel Power SpeedFET

General Description

It combines advanced trench MOSFET technology with a low resistance package to provide extremely low

$R_{DS(ON)}$.


Features

- AEC-Q101 Qualified
- Low $R_{DS(ON)}$ to minimize conductive loss
- Low Gate Charge for fast switching
- Low Thermal resistance

Application

- BLDC Motor driver
- DC-DC
- Load switch


Product Summary



$V_{DS} = 60V$

$R_{DS(ON)} = 5.4m\Omega$

$I_D = 45A$



DFN3*3

Ordering Information:

Part NO.	KSPR054N06-V
Marking	054N06

Absolute Maximum Ratings ($T_C=25^\circ C$)

Parameter	Symbol	Conditions	Value	Unit
Drain-Source Voltage	V_{DS}		60	V
Gate-Source Voltage ^①	V_{GS}		± 20	V
Continuous Drain Current	I_D	$T_C=25^\circ C$	45	A
	I_D	$T_C=75^\circ C$	45	A
	I_D	$T_C=100^\circ C$	43	A
Pulsed Drain Current	I_{DM}	Pulsed; $t_p \leq 10 \mu s$; $T_{mb} = 25^\circ C$;	180	A
Total Power Dissipation	P_D	$T_C=25^\circ C$	56	W
Total Power Dissipation	P_D	$T_A=25^\circ C$	2.5	W
Operating Junction Temperature	T_J		-55 to +175	$^\circ C$
Storage Temperature	T_{STG}		-55 to +175	$^\circ C$
Single Pulse Avalanche Energy	E_{AS}	$L=0.1mH$, $V_{GS}=10V$, $R_g=25\Omega$,	61	mJ
		$L=0.5mH$, $V_{GS}=10V$, $R_g=25\Omega$,	128	mJ
ESD Level (HBM)	CLASS 2			

● **Thermal resistance**

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction - case	R_{thJC}		-	2.7	°C/W
Thermal resistance, junction-ambient ^②	R_{thJA}		-	60	°C/W
Soldering temperature	T_{sold}		-	260	°C

● **Electronic Characteristics**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	60			V
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	1.3	1.8	2.5	V
Drain-Source Leakage Current	I_{DSS}	$V_{GS}=0V, V_{DS}=60V$			1.0	μA
Gate- Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$			100	nA
Static Drain-source On Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=12A$		5.4	7	m Ω
		$V_{GS}=4.5V, I_D=10A$		7	8.5	m Ω
Forward Transconductance	g_{FS}	$V_{DS}=5V, I_{SD}=10A$		16		S
Diode Forward Voltage	V_{FSD}	$V_{GS}=0V, I_{SD}=12A$			1.3	V

● **Dynamic characteristics**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input capacitance	C_{iss}	$f=1MHz, V_{DS}=25V$	-	1720	-	pF
Output capacitance	C_{oss}		-	960	-	
Reverse transfer capacitance	C_{rss}		-	91	-	
Gate Resistance	R_g	$f=1MHz$	-	1.4		Ω
Total gate charge	Q_g	$V_{DD}=15V, I_D=20A, V_{GS}=10V$	-	29	-	nC
	$Q_g(4.5V)$		-	14	-	
Gate - Source charge	Q_{gs}		-	4.4	-	
Gate - Drain charge	Q_{gd}		-	7.3	-	
Turn-ON Delay time	$t_{D(on)}$	$V_{GS}=10V, V_{DS}=15V, R_G=3.3\Omega, I_D=20A$	-	16	-	ns
Turn-ON Rise time	t_r		-	17	-	ns
Turn-Off Delay time	$t_{D(off)}$		-	28	-	ns
Turn-Off Fall time	t_f		-	15	-	ns
Reverse Recovery Time	t_{RR}	$V_{DD}=20V, dI_S/dt=100A/\mu s, I_S=20A$	-	21	-	ns
Reverse Recovery Charge	Q_{RR}		-	20	-	nC

Fig.1 Gate-Charge Characteristics

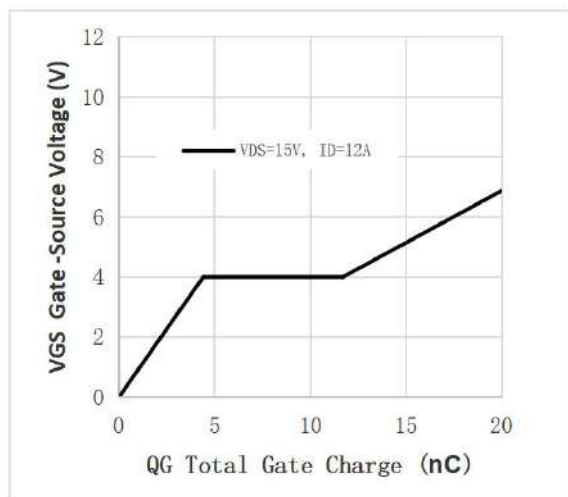


Fig.2 Capacitance Characteristics

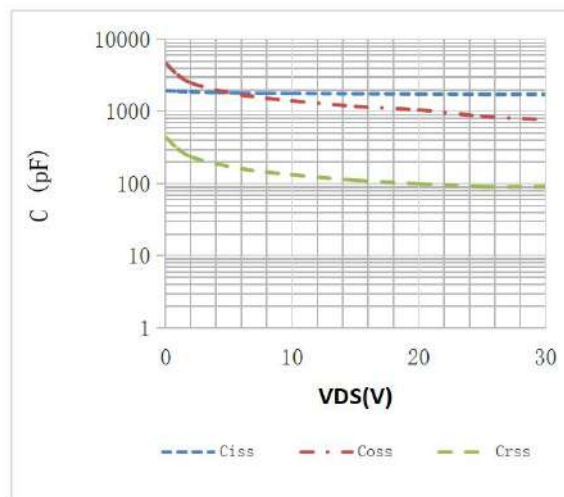


Fig.3 Power Dissipation

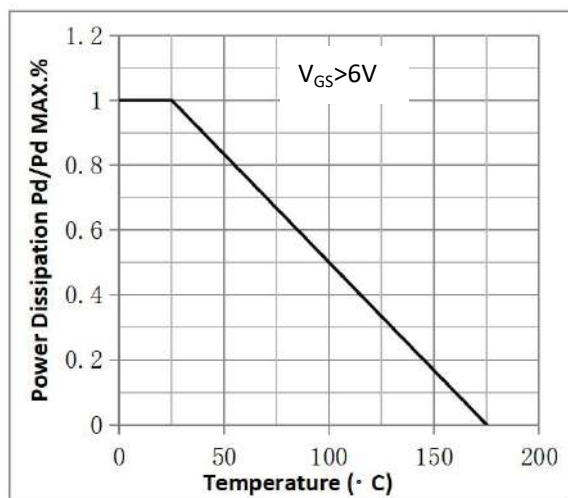


Fig.4 Typical output Characteristics

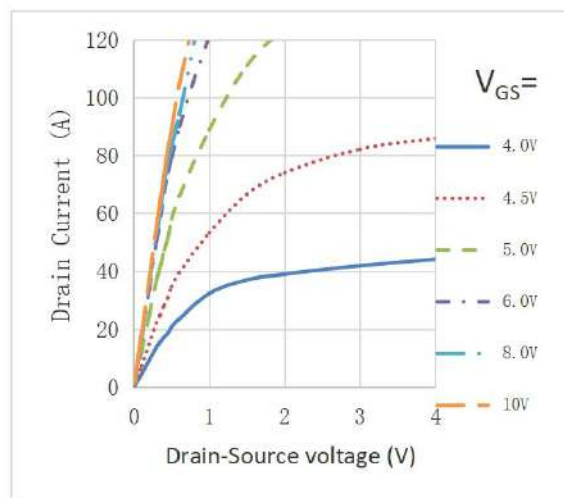


Fig.5 Threshold Voltage V.S Junction Temperature

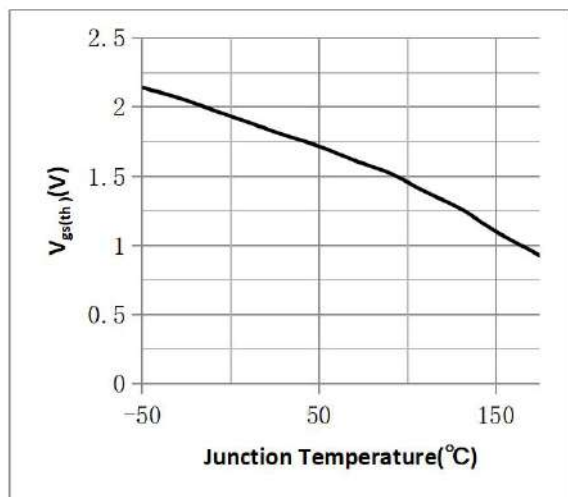


Fig.6 Resistance V.S Drain Current

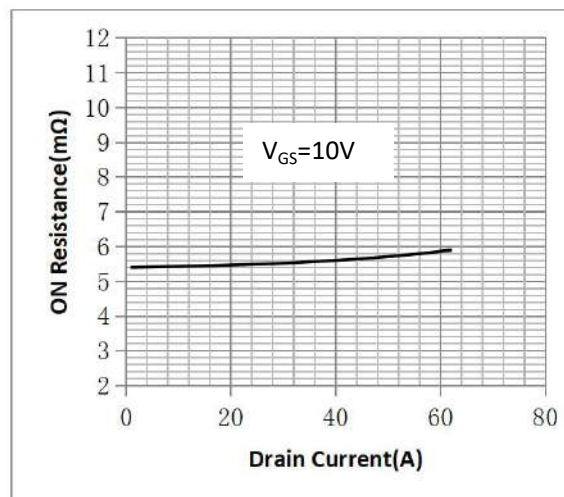


Fig.7 On-Resistance VS Gate Source Voltage

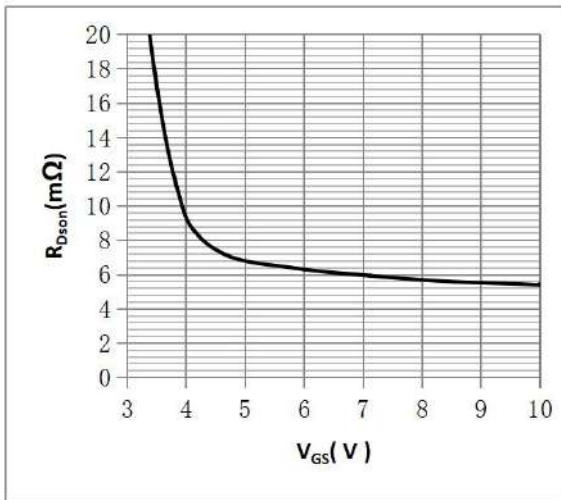


Fig.8 On-Resistance V.S Junction Temperature

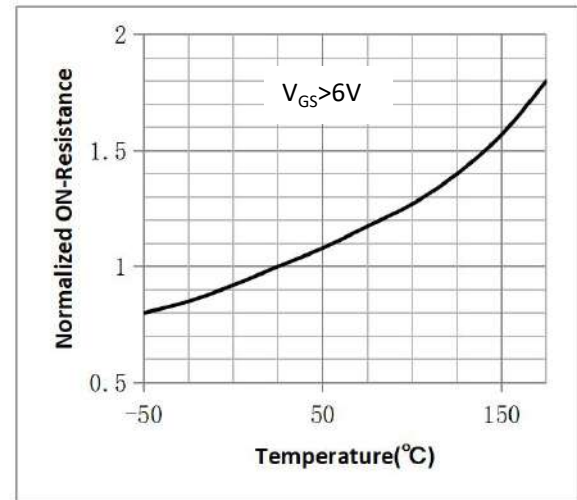


Figure 9. Diode Forward Voltage vs. Current

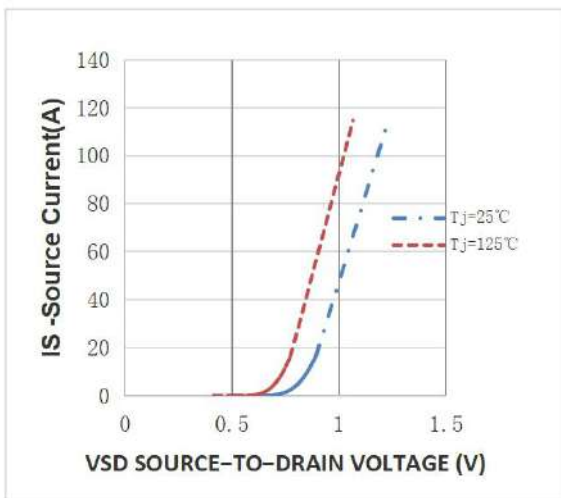


Figure 10. Transfer Characteristics

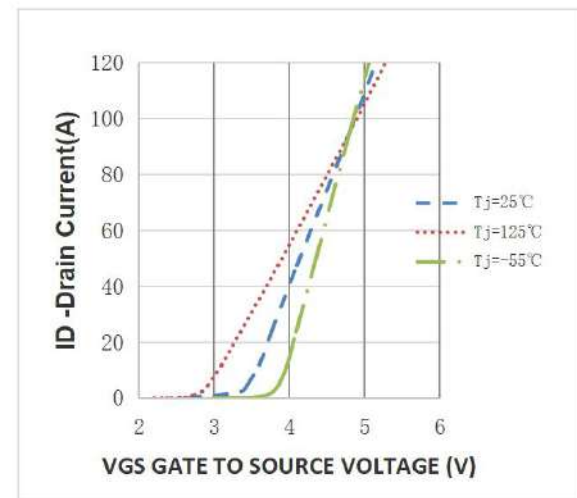


Fig.11 Safe Operating Area



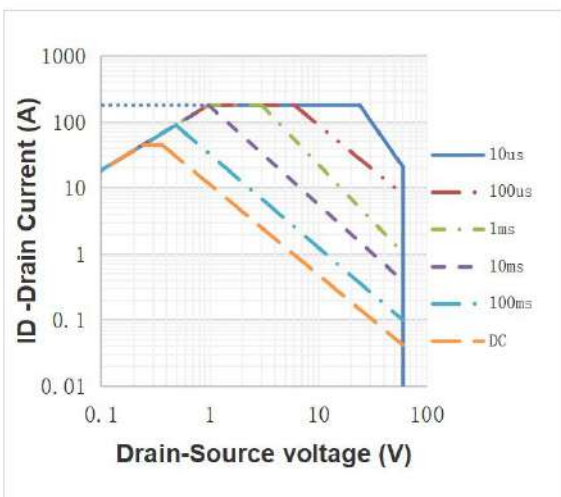



Fig.12 ID vs. Junction Temperature^③

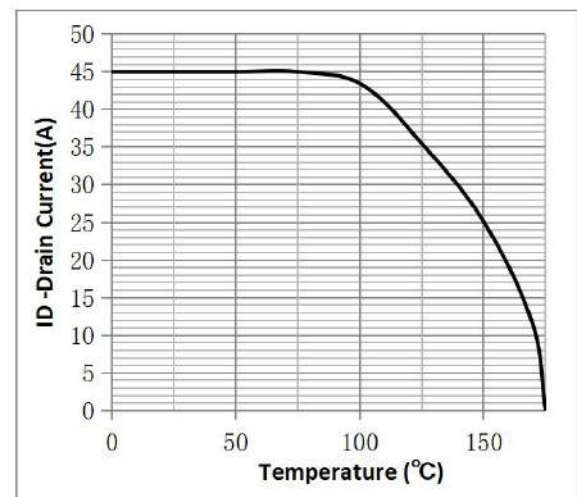

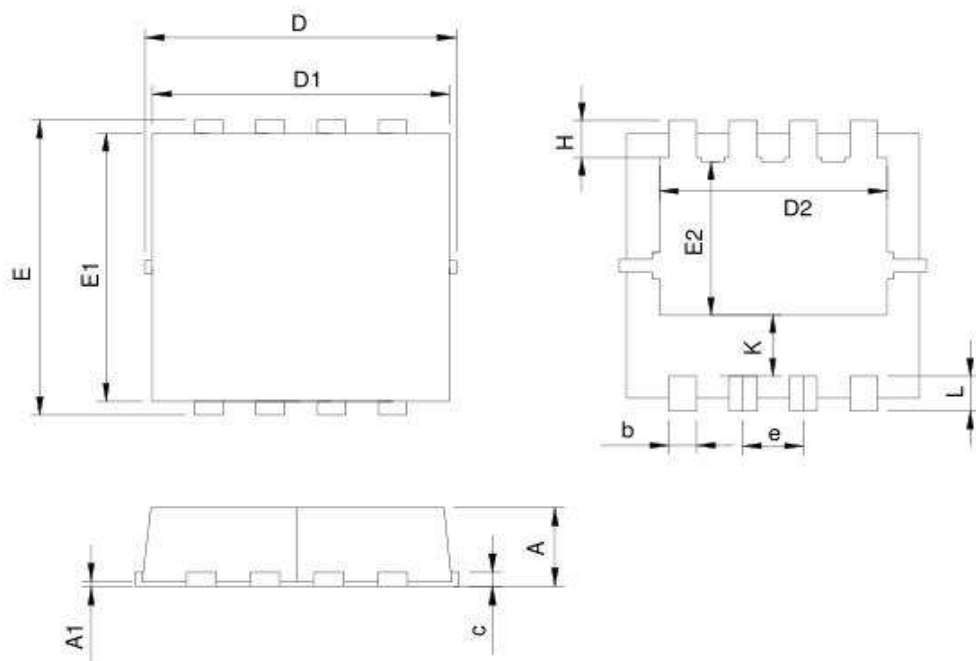

SYMBOL	DFN3.3x3.3-8			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	0.70	1.00	0.028	0.039
A1	0.00	0.05	0.000	0.002
b	0.25	0.35	0.010	0.014
c	0.14	0.20	0.006	0.008
D	3.10	3.50	0.122	0.138
D1	3.05	3.25	0.120	0.128
D2	2.35	2.55	0.093	0.100
E	3.10	3.50	0.122	0.138
E1	2.90	3.10	0.114	0.122
E2	1.64	1.84	0.065	0.072
e	0.65 BSC		0.026 BSC	
H	0.32	0.52	0.013	0.020
K	0.59	0.79	0.023	0.031
L	0.25	0.55	0.010	0.022

RECOMMENDED LAND PATTERN

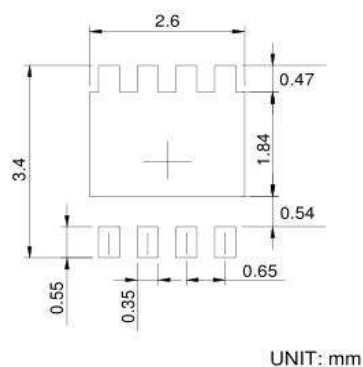

UNIT: mm