

-60V P-Channel Power MOSFET

• General Description

It combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$.


• Features

- Low $R_{DS(ON)}$ to minimize conductive loss
- High GOX reliability
- Low Thermal resistance

• Application

- BLDC Motor driver
- DC-DC
- Load Switch


• Product Summary



$$V_{DS} = -60V$$

$$R_{DS(ON)} = 103m\Omega$$

$$I_D = -2A$$



SOT-23-3



• Ordering Information:

Part NO.	KN930P06
Marking	930P06
Packing Information	REEL TAPE
Basic ordering unit (pcs)	3000

• Absolute Maximum Ratings ($T_C=25^\circ C$)

Parameter	Symbol	Conditions	Value	Unit
Drain-Source Voltage	V_{DS}	$25^\circ C \leq T_J \leq 150^\circ C$	-60	V
Gate-Source Voltage	V_{GS}		± 20	V
Continuous Drain Current	I_D	$T_C=25^\circ C$	-2.0	A
	I_D	$T_C=75^\circ C$	-1.98	A
	I_D	$T_C=100^\circ C$	-1.59	A
Pulsed Drain Current	I_{DM}	Pulsed; $t_p \leq 10 \mu s$; $T_{mb} = 25^\circ C$;	-8	A
Total Power Dissipation	P_D	$T_C=25^\circ C$	2	W
Total Power Dissipation	P_D	$T_A=25^\circ C$	0.7	W
Operating Junction Temperature	T_J		-55 to +150	$^\circ C$
Storage Temperature	T_{STG}		-55 to +150	$^\circ C$
Single Pulse Avalanche Energy	E_{AS}	$L=0.1mH$, $V_{GS}=10V$, $R_g=25\Omega$,	1.2	mJ
		$L=0.5mH$, $V_{GS}=10V$, $R_g=25\Omega$,	2.52	mJ
ESD Level (HBM)	CLASS 2			

•Thermal resistance

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction - case	R_{thJC}		-	80	°C/W
Thermal resistance, junction-ambient ^①	R_{thJA}		-	180	°C/W
Soldering temperature	Tsold		-	260	°C

•Electronic Characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	-60			V
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	-1.3	-1.8	-2.5	V
Drain-Source Leakage Current	I_{DSS}	$V_{GS}=0V, V_{DS}=-60V$			1.0	μA
Gate- Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$			100	nA
Static Drain-source On Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=-1.5A$		103	130	m Ω
		$V_{GS}=4.5V, I_D=-1A$		128	166	m Ω
Forward Transconductance	g_{FS}	$V_{GS}=5V, I_{SD}=-1A$		20		S
Diode Forward Voltage	V_{FSD}	$V_{GS}=0V, I_{SD}=-1.5A$			1.3	V

•Dynamic characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input capacitance	C_{iss}	$f=1MHz, V_{DS}=-25V$	-	650	-	pF
Output capacitance	C_{oss}		-	95	-	
Reverse transfer capacitance	C_{rss}		-	70	-	
Gate Resistance	R_g	$f=1MHz$	-	8		Ω
Total gate charge	Q_g	$V_{DD}=-15V, I_D=-1A, V_{GS}=-10V$	-	12	-	nC
	$Q_g(-4.5v)$		-	21	-	
Gate - Source charge	Q_{gs}		-	1.6	-	
Gate - Drain charge	Q_{gd}		-	2.6	-	
Turn-ON Delay time	$t_{D(on)}$	$V_{GS}=-10V, V_{DS}=-15V, R_G=3.3\Omega, I_D=-1A$	-	6.5	-	ns
Turn-ON Rise time	t_r		-	8	-	ns
Turn-Off Delay time	$t_{D(off)}$		-	16.5	-	ns
Turn-Off Fall time	t_f		-	4	-	ns

Fig.1 Gate-Charge Characteristics

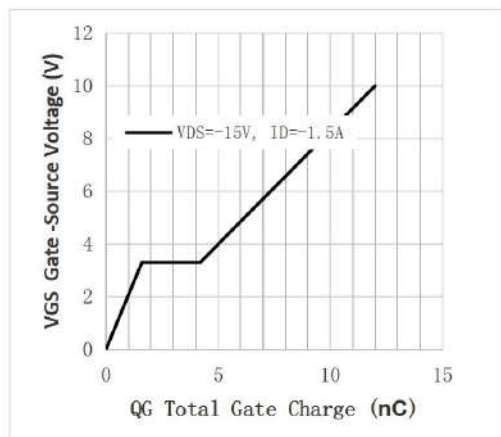


Fig.2 Capacitance Characteristics

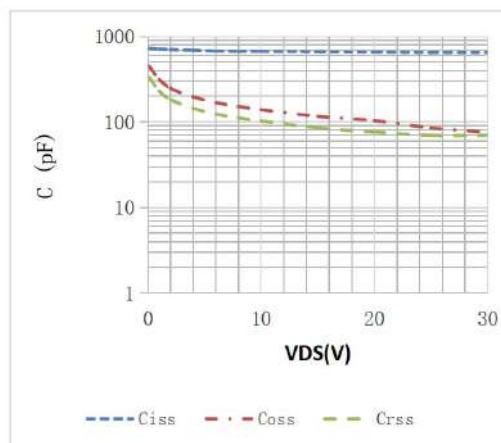


Fig.3 Power Dissipation

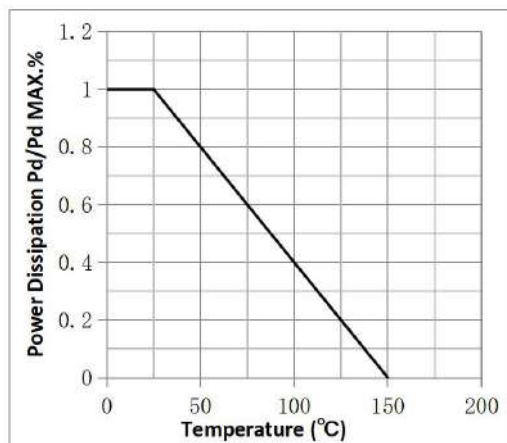


Fig.4 Typical output Characteristics

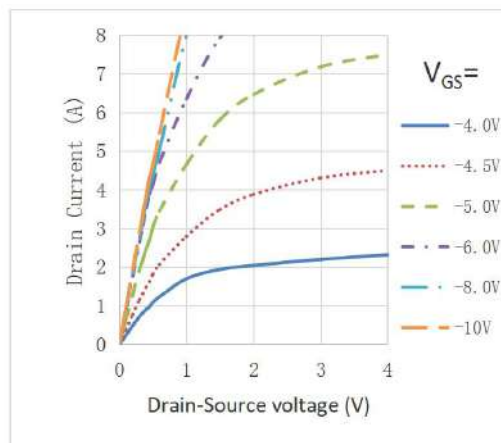


Fig.5 Threshold Voltage V.S Junction Temperature

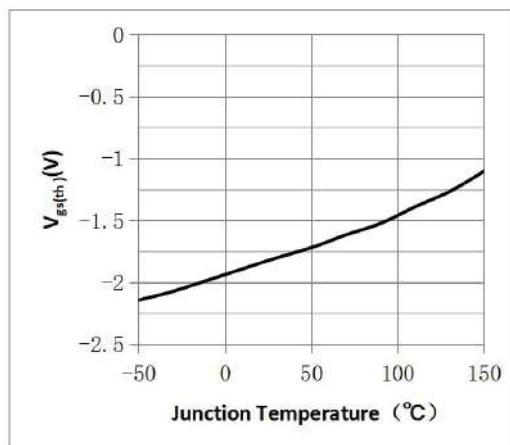


Fig.6 Resistance V.S Drain Current

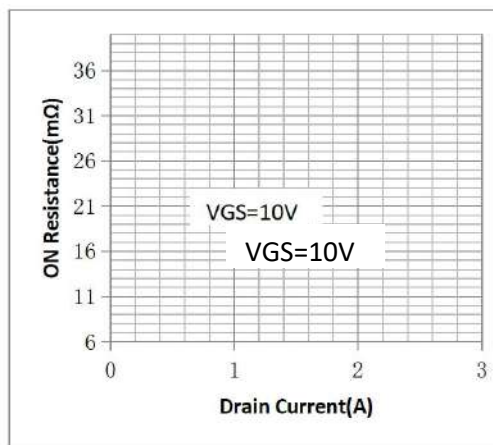


Fig.7 On-Resistance VS Gate Source Voltage

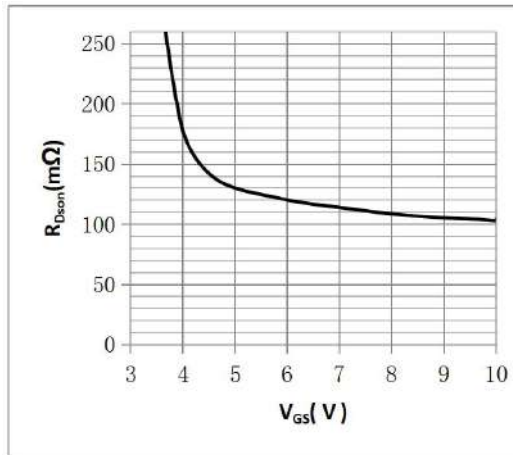


Fig.8 On-Resistance V.S Junction Temperature

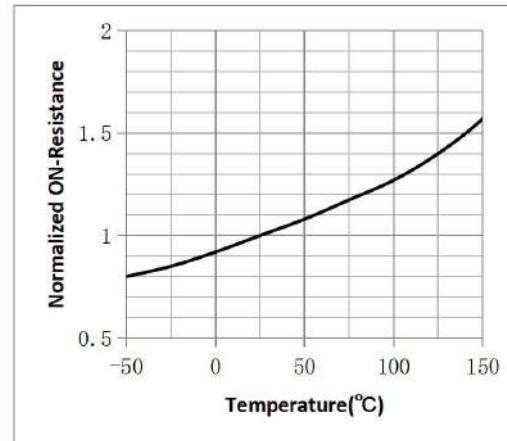


Figure 9. Diode Forward Voltage vs. Current

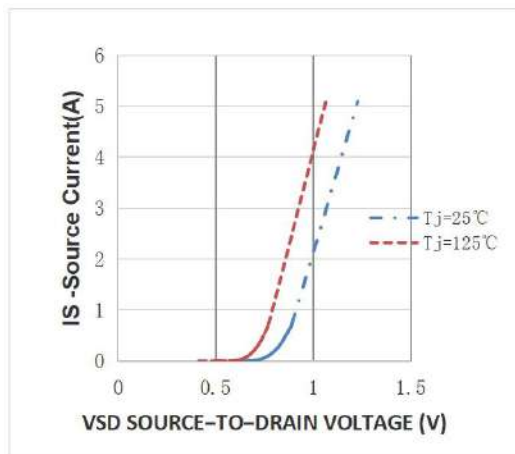


Figure 10. Transfer Characteristics

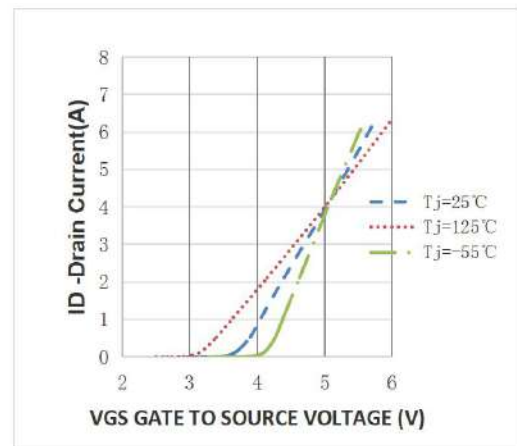


Fig.11 SOA Maximum Safe Operating Area



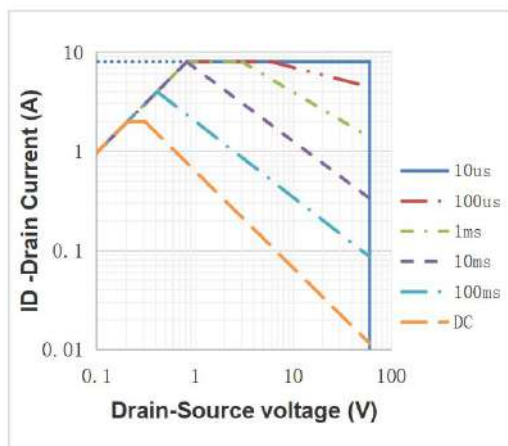


Fig.12 ID vs. Case Temperature^②

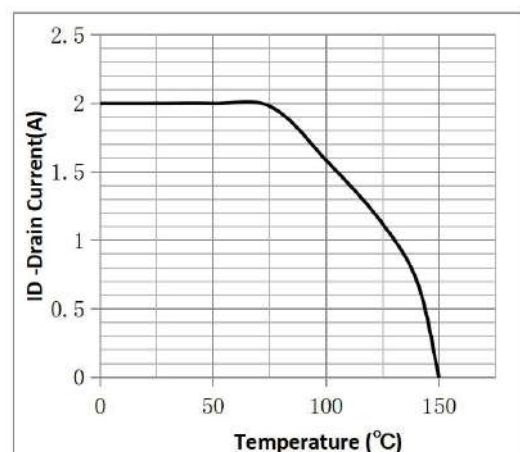

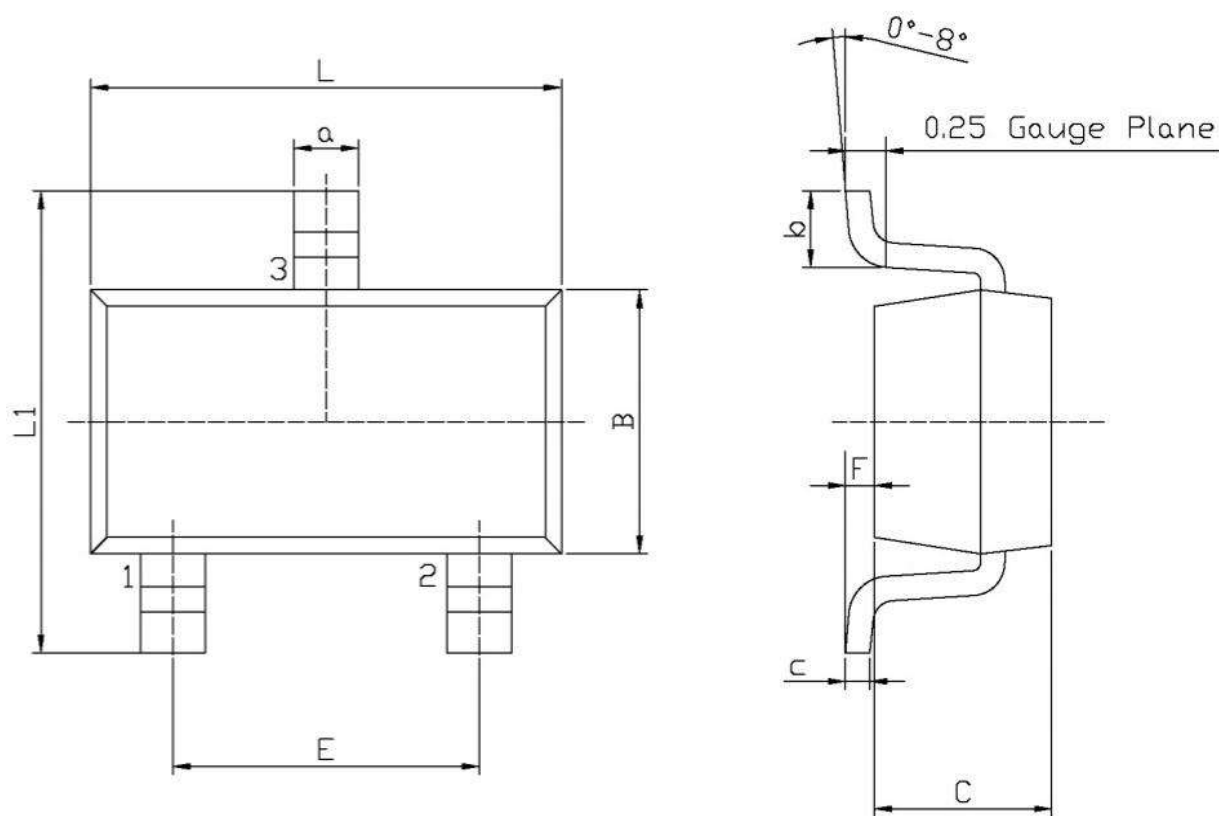

Unit: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.82	3.02	a	0.35	0.50
B	1.50	1.70	c	0.10	0.20
C	0.90	1.30	b	0.35	0.55
L1	2.60	3.00	F	0	0.15
E	1.80	2.00			