


1-Line Bi-directional TVS Diode

Features

- Operating voltage: 5.5V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 Air discharge: $\pm 30\text{kV}$
 Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-5 (Lightning) 6A (8/20 μs)
- RoHS Compliant


Dimensions DFN1006



Applications

- USB Ports
- SIM Ports
- Smart Phones
- Wireless Systems
- Set-top box and digital TV
- Digital video interface (DVI)
- Ethernet 10/100/1000 Base T

Pin Configuration



Mechanical Characteristics

- Package: DFN1006
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel: 10,000 pcs
- Reel Size: 7 inch
- Device Marking: 51F

Absolute Maximum Ratings (T_{amb}=25°C unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P _{pp}	60	W
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 30	kV
ESD per IEC 61000-4-2 (Contact)		± 30	
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STJ}	-55 to +150	°C

Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				5.5	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	5.8		9.5	V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$			0.2	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}$ (8 x 20 μs pulse)		6	7.5	V
Clamping Voltage	V_C	$I_{PP} = 6\text{A}$ (8 x 20 μs pulse)		8	10	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$		0.3	0.4	pF

Electrical Parameters (TA=25°C unless otherwise specified)

Symbol	Definition
I_{PP}	Peak Pulse Current
V_C	Clamping Voltage
V_{RWM}	Reverse Working Voltage
I_R	Reverse Leakage Current
V_{BR}	Breakdown Voltage
I_T	Test Current

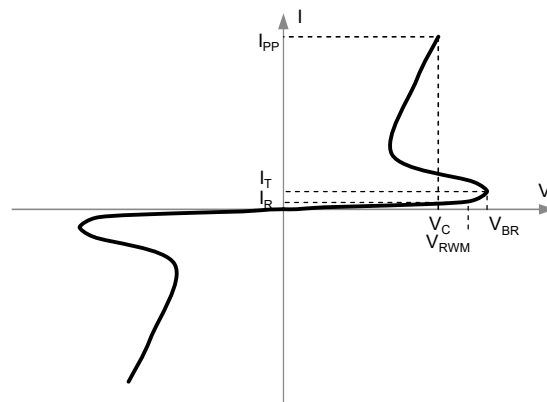

Typical Performance Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Fig.1 - Peak Pulse Power Rating

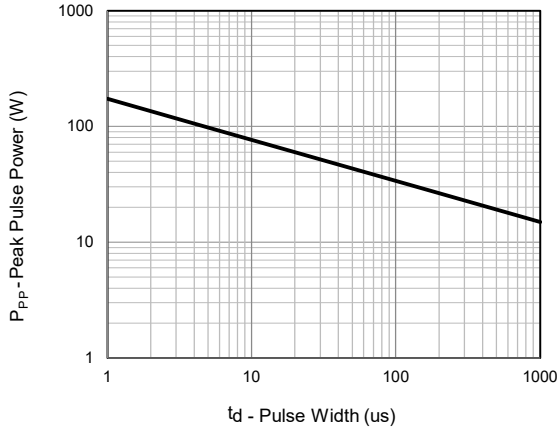


Fig.2 - Pulse Derating Curve

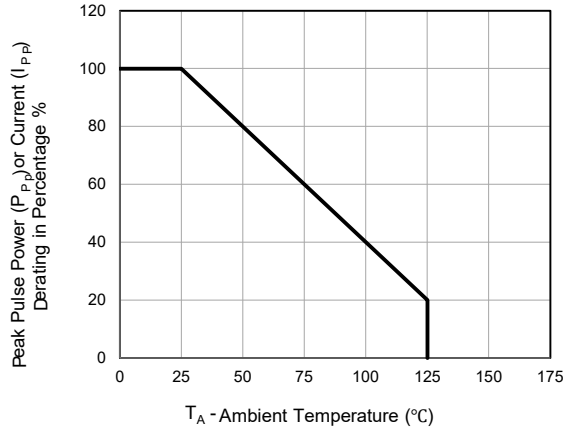


Fig.3 - 8/20us Pulse Waveform

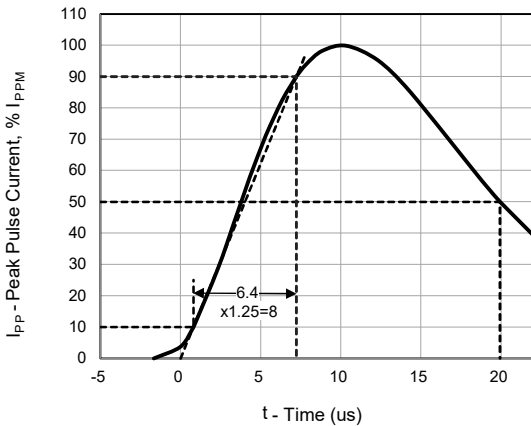


Fig.4 - Typical Clamping Voltage

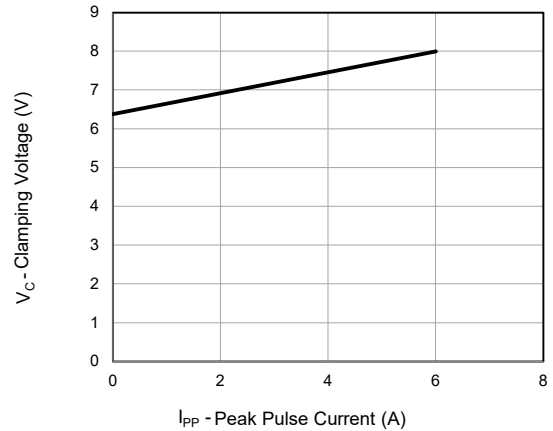


Fig.5 - ESD Pulse Waveform (IEC61000-4-2)



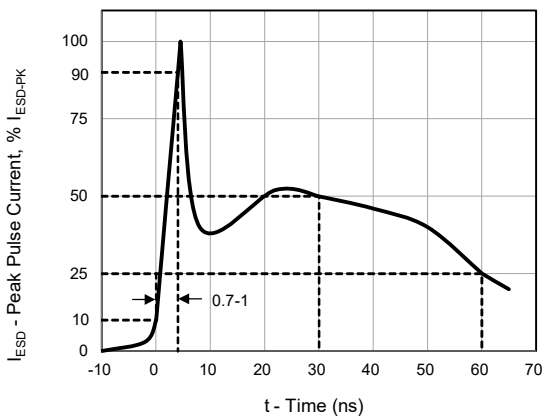


Fig.6 - 5/50ns EFT Waveform (IEC61000-4-4)

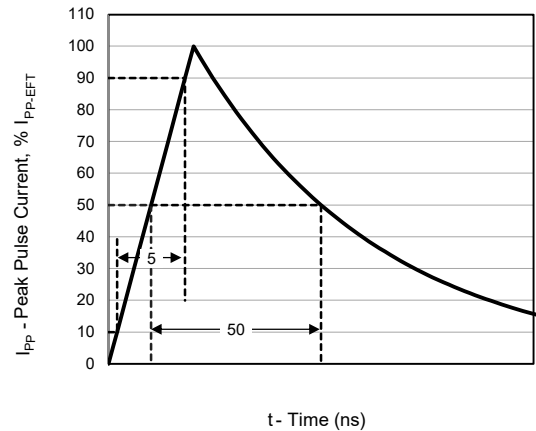

DFN1006 Package Outline Drawing

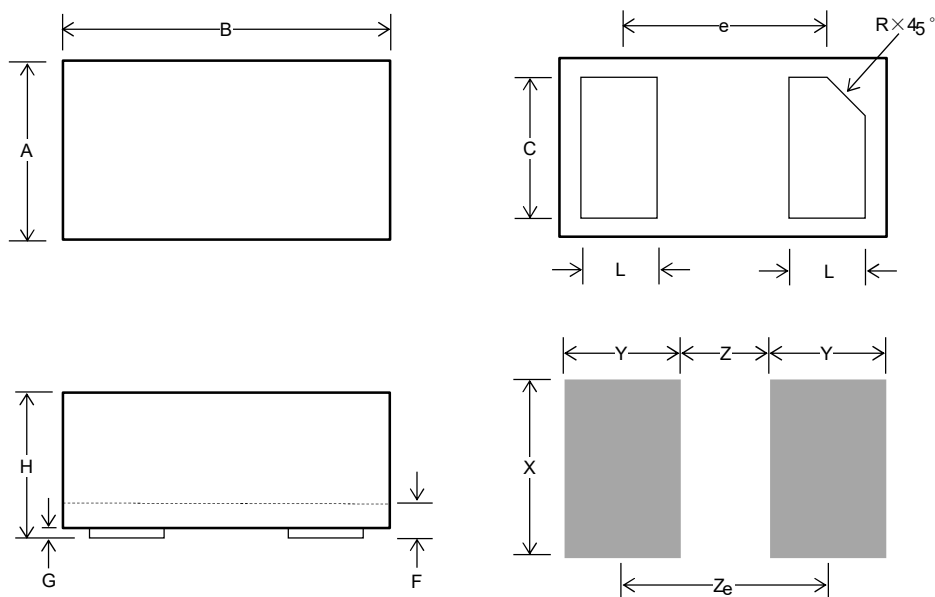

DFN1006			
SYMBOL	Millimeters		
	MIN	NOM	MAX
A	0.55	0.6	0.65
B	0.95	1	1.05
C	0.45	0.5	0.55
F	0.12	0.15	0.18
G	0	0.02	0.05
H	0.45	0.5	0.55
L	0.2	0.25	0.3
e		0.65	
X		0.6	
Y		0.5	
Z		0.3	
Ze		0.8	